



DIN power female connector



General information

Design	IEC 60603-2	types: 2F female
No. of contacts	max. 24	
Contact spacing	5,08 mm	3,81mm between rows
Test voltage	1550V	
Contact resistance	max. 15mOhm	
Insulation resistance	min. 10 ¹⁰ Ohm	
Working current	max. 6A at 20°C (see derating diagram)	
Temperature range	-55°C ... +125°C	
Termination technology	crimp	
Clearance	min. 1,6 mm	
Creepage	min. 3,0 mm	
Insertion and withdrawal force	24-pole max. 37N	
Mating cycles	- PL1 acc. to IEC 60603-2 => - PL2 acc. to IEC 60603-2 =>	500 mating cycles 400 mating cycles
UL file	E102079	
RoHS - compliant	Yes	
Leadfree	Yes	
Hot plugging	No	

Insulator material

Material	PC (thermoplastics, glass fiber reinforcement 30%)
Colour	RAL 7032 (grey)
UL classification	UL 94-V0
Material group acc. to IEC 60664-1	IIIa (175 ≤ CTI < 400)
NFF classification	I2, F1


Contact material

Contact material	Copper alloy
Plating termination zone	Ni
Plating contact zone	Au over PdNi over Ni

Derating diagram acc. to IEC 60512-5 (Current carrying capacity)

The current carrying capacity is limited by maximum temperature of materials for inserts and contacts including terminals.
The current capacity curve is valid for continuous, non interrupted current loaded contacts of connectors when simultaneous power on all contacts is given, without exceeding the maximum temperature.

Control and test procedures according to DIN IEC 60512-5

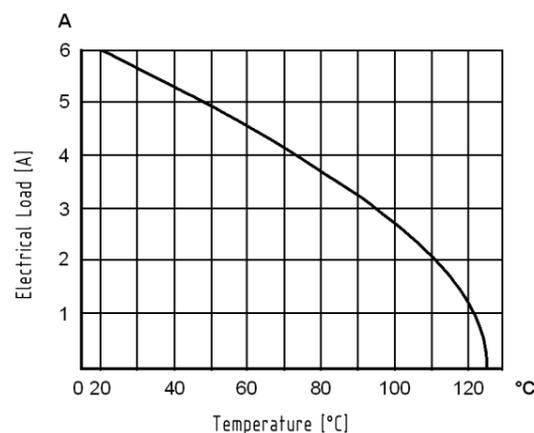


Installation of crimp contacts

Fitting the crimp contacts

After crimping the wires onto the contacts with the help of a crimping tool or an automatic crimping machine the contacts should be correctly oriented and inserted into the cavities of the connector moulding in the required configuration. They snap into position and are firmly held in place. A light pull on the wire assures the correct tensile strength of the contact. When using stranded wires with a gauge below 0.37 mm² an insertion tool is necessary.

Removing the crimp contacts

The removal tool is inserted into a slot on the side of the respective crimp cavity. This action compresses the contact retaining spring therefore the contact can then be easily withdrawn using a light pull on the wire. This action will cause no damage to the contact/wire which can be repositioned/refitted as necessary. The drawing demonstrates the crimp removal procedure(max. 5x).

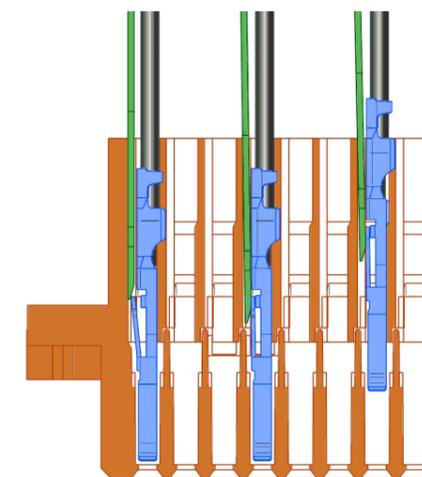

	All Dimensions in mm Original Size DIN A3	Scale 1:1	Free size tol.	Ref. Sub. DS 09 06 210 08 01 / EC01557 / 28.04.2011		
	All rights reserved Department EC PD - DE	Created by HAGEMEYERE	Inspected by TADJE	Standardisation HOFFMANN	Date 2014-09-12	State Final Release
HARTING Electronics GmbH D-32339 Espelkamp		Title DIN power female connector			Doc-Key / ECM-Nr. 100581028/UGD/000/A 500000076069	
		Type DS	Number 09062100801		Rev. A	Page 1/1