


## SEK-18 SV MA STD ANG45 RKZ 20P PLS4

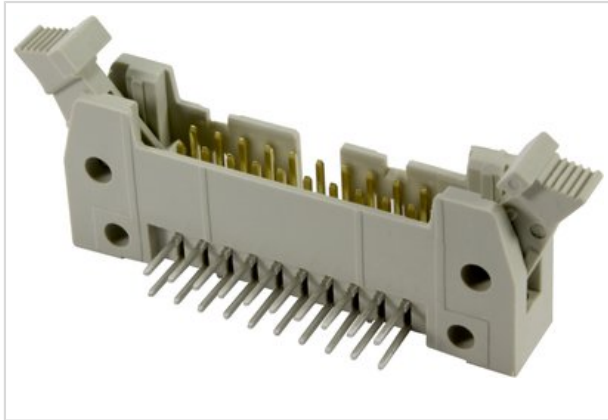

|                    |   |
|--------------------|---|
| Part number        | 09 18 520 5911  |
| Specification      | SEK-18 SV MA STD ANG45 RKZ 20P PLS4   |
| HARTING eCatalogue | <a href="https://b2b.harting.com/09185205911">https://b2b.harting.com/09185205911</a> |

### Identification

|                            |                |
|----------------------------|----------------|
| Category                   | Connector      |
| Series                     | SEK Standard   |
| Element                    | Male connector |
| Description of the contact | Angled         |

### Version

|                    |                            |
|--------------------|----------------------------|
| Termination method | Wave soldering termination |
| Locking type       | With short levers          |
| Connection type    | PCB to cable               |
| Number of contacts | 20                         |
| Termination length | 4.5 mm                     |
| Performance level  | 1<br>NM 30 (S4)            |

### Technical characteristics

|                                    |                           |
|------------------------------------|---------------------------|
| Contact rows                       | 2                         |
| Contact spacing (termination side) | 2.54 mm                   |
| Rated current                      | 1 A                       |
| Rated voltage                      | 500 V                     |
| Insulation resistance              | $>10^9 \Omega$            |
| Contact resistance                 | $\leq 20 \text{ m}\Omega$ |
| Limiting temperature               | -55 ... +125 °C           |
| Insertion and withdrawal force     | $\leq 40 \text{ N}$       |



Pushing Performance

## Technical characteristics

|                           |      |
|---------------------------|------|
| Test voltage $U_{r.m.s.}$ | 1 kV |
|---------------------------|------|

## Material properties

|   |                           |
|---|---------------------------|
| Material (insert)                         | Thermoplastic resin (PBT) |
| Colour (insert)                           | Grey                      |
| Material flammability class acc. to UL 94 | V-0                       |
| RoHS                                      | compliant                 |
| ELV status                                | compliant                 |
| China RoHS                                | e                         |
| REACH Annex XVII substances               | No                        |
| REACH ANNEX XIV substances                | No                        |
| REACH SVHC substances                     | No                        |

## Specifications and approvals

|          |  |
|----------|--|
| UL / CSA | UL 1977 ECBT2.E102079<br>CSA-C22.2 No. 182.3 ECBT8.E102079 |
|----------|--|

## Commercial data

|                                |                        |
|--------------------------------|------------------------|
| Packaging size                 | 100                    |
| Net weight                     | 8.7 g                  |
| Country of origin              | Switzerland            |
| European customs tariff number | 85366953               |
| eCl@ss                         | 27440402 PCB connector |