


## Han D 25 Pos. M Insert Wire Wrap

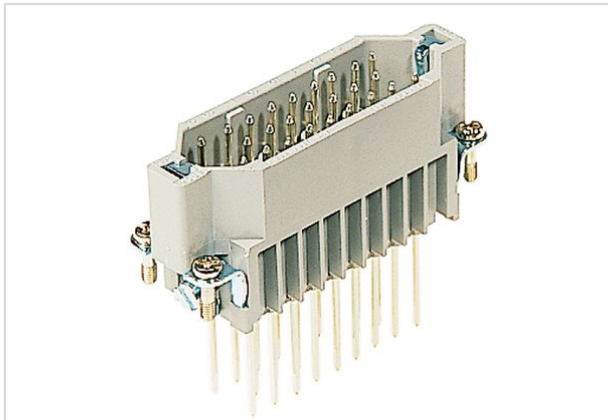

Part number	09 21 025 2601
Specification	Han D 25 Pos. M Insert Wire Wrap
HARTING eCatalogue	<a href="https://b2b.harting.com/09210252601">https://b2b.harting.com/09210252601</a>

### Identification

Category	Inserts
Series	Han D <sup>®</sup>

### Version

Termination method	Wrap termination
Gender	Male
Size	16 A
Number of contacts	25
PE contact	Yes
Termination length	22 mm

### Technical characteristics

Dimensions wire wrap post	1 x 1 mm
Rated current	10 A
Rated voltage	250 V
Rated impulse voltage	4 kV
Pollution degree	3
Rated voltage acc. to UL	600 V
Rated voltage acc. to CSA	600 V
Insulation resistance	$>10^{10} \Omega$
Contact resistance	$\leq 3 \text{ m}\Omega$
Limiting temperature	-40 ... +125 °C
Mating cycles	$\geq 500$



Pushing Performance

## Material properties

Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy
Surface (contacts)	Silver plated
Material flammability class acc. to UL 94	V-0
RoHS	compliant with exemption
RoHS exemptions	6(c): Copper alloy containing up to 4 % lead by weight
ELV status	compliant with exemption
China RoHS	50
REACH Annex XVII substances	No
REACH ANNEX XIV substances	No
REACH SVHC substances	Yes
REACH SVHC substances	Lead

## Specifications and approvals

Specifications	EN 60664-1
	IEC 61984
	EN 175301-801
Approvals	DNV GL
UL / CSA	UL 1977 ECBT2.E235076
	CSA-C22.2 No. 182.3 ECBT8.E235076

## Commercial data

Packaging size	9
Net weight	63.06 g
Country of origin	Romania
European customs tariff number	85366990
eCl@ss	27440205 Contact insert for industrial connectors