

HPP V4 Power insert crimp 250V/16A 3p



Part number	09 46 500 3401
Specification	HPP V4 Power insert crimp 250V/16A 3p
HARTING eCatalogue	https://b2b.harting.com/09465003401

Identification

Category	Connector
Series	HARTING PushPull (V4)
Identification	Power
Element	Female

Version

Termination method	Crimp termination
Locking type	PushPull
Number of contacts	2
PE contact	Yes
Pack contents	Without contacts

Technical characteristics

Conductor cross-section	0.75 ... 2.5 mm ² Stranded
Conductor cross-section	AWG 20 ... AWG 12 Stranded
Rated current	16 A
Rated voltage	250 V
Rated impulse voltage	4 kV
Pollution degree	3
Limiting temperature	-40 ... +70 °C
Mating cycles	≥750
Degree of protection acc. to IEC 60529	IP65 IP67



Pushing Performance

Technical characteristics

Cable diameter 4.9 ... 8.6 mm

Material properties

Material (hood/housing)	Thermoplastic
Colour (hood/housing)	Black
Material flammability class acc. to UL 94	V-0
RoHS	compliant
ELV status	compliant
China RoHS	e
REACH Annex XVII substances	No
REACH ANNEX XIV substances	No
REACH SVHC substances	No

Specifications and approvals

Specifications	IEC 61076-3-106 Variant 4 (V4)
UL / CSA	UL 1977 ECBT2.E235076 CSA-C22.2 No. 182.3 ECBT8.E235076

Commercial data

Packaging size	100
Net weight	2.52 g
Country of origin	Romania
European customs tariff number	85366990
eCl@ss	27440205 Contact insert for industrial connectors




Pushing Performance

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2

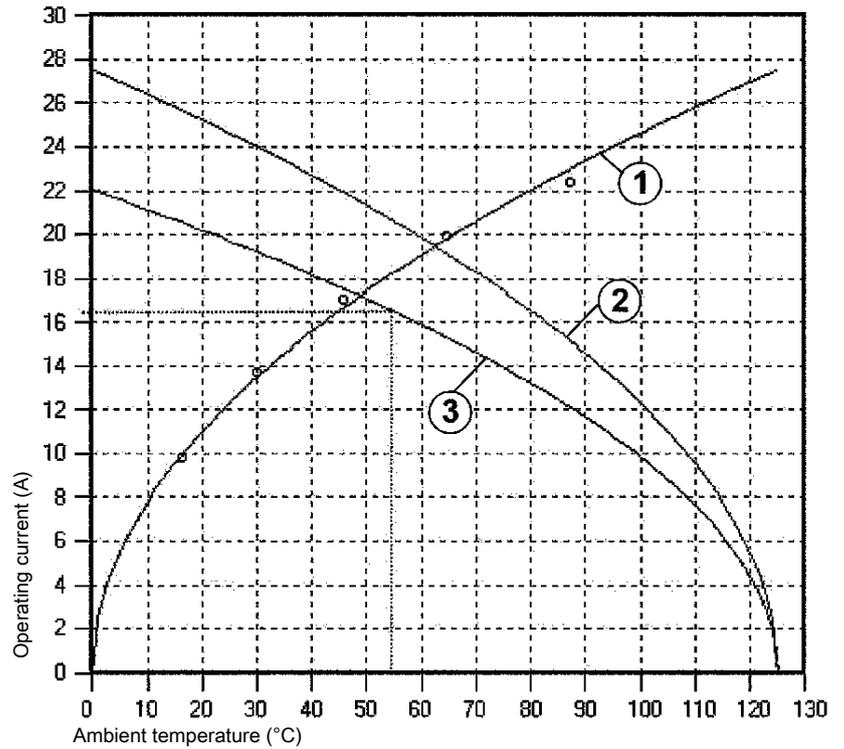

- ① Heating
 - ② Derating curve
 - ③ Derating curve 80%
- Conductor cross-section 2.5 mm²