



A-A (2:1)

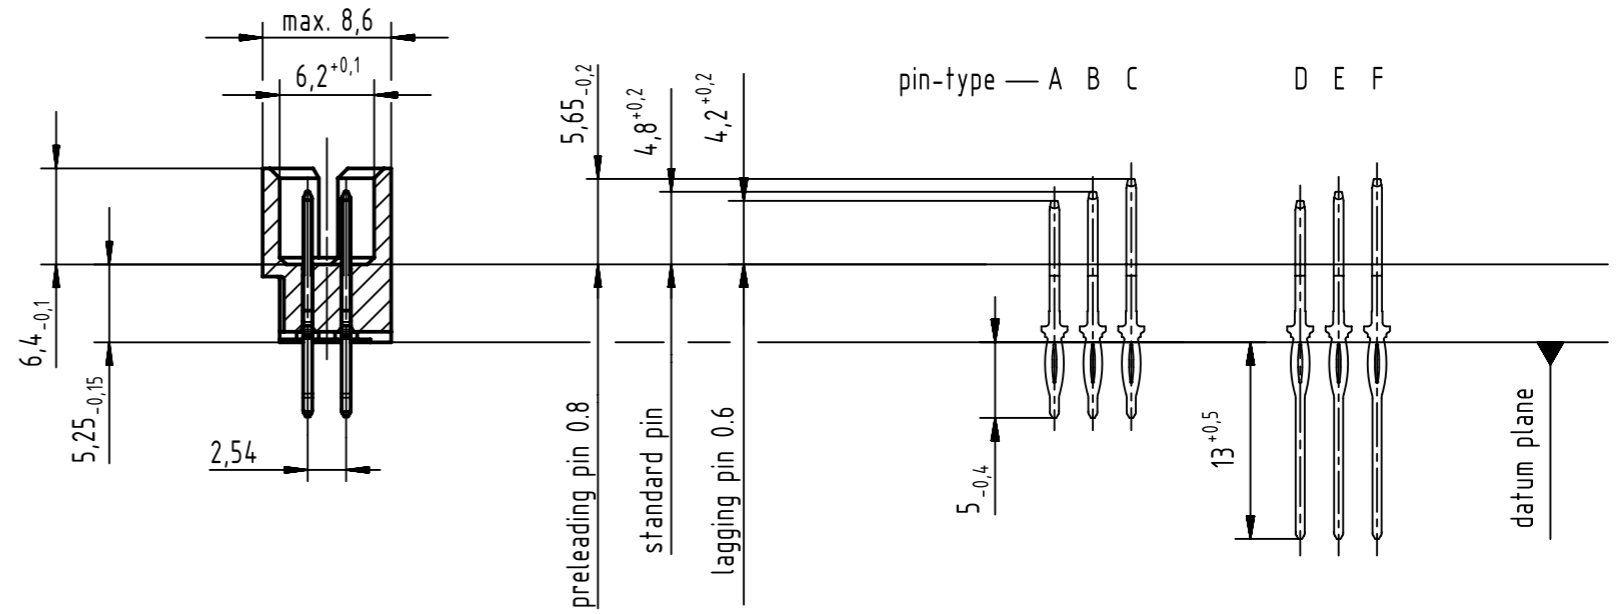

B (2:1)

contact loading

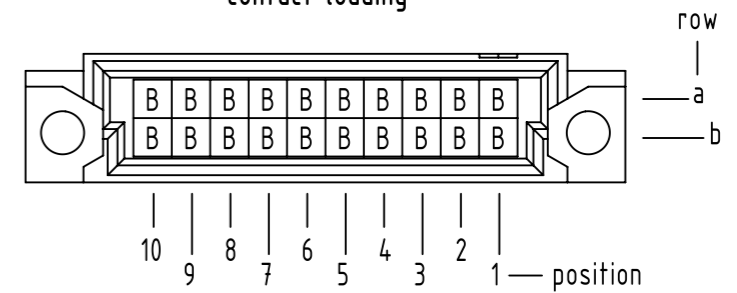

$\text{Ø}1$ recommended configuration of plated through holes and further information see: DS 09731100001

09 75 120 6904	2
part no.	performance level $\text{Ø}1$

	All rights reserved	Created by STORCK	Inspected by LEHNERT	Standardisation HOFFMANN	Date 2019-03-20	State Final Release
	Department EL PD	Title DIN Signal type 3Q male press-in 5.0 20-pole		Doc-Key / ECM-Nr. 100223825/UGD/001/B 500000148630		
HARTING Electronics GmbH D-32339 Espelkamp		Type TB	Number 0975120X904		Rev. B	Page 1/1