



Part number	no. of contacts	A	B	C	D	E	F
1515 006 x401 xxx	6	2,54	6,96	8,06	5,76	4,76	8,89
1515 012 x401 xxx	12	6,35	10,77	11,87	9,57	8,57	12,70
1515 016 x401 xxx	16	8,89	13,31	14,41	12,11	11,11	15,24
1515 020 x401 xxx	20	11,43	15,85	16,95	14,65	13,65	17,78
1515 026 x401 xxx	26	15,24	19,66	20,76	18,46	17,46	21,59
1515 032 x401 xxx	32	19,05	23,47	24,57	22,27	21,27	25,40
1515 040 x401 xxx	40	24,13	28,55	29,65	27,35	26,35	30,48
1515 050 x401 xxx	50	30,48	34,90	36,00	33,70	32,70	36,83
1515 068 x401 xxx	68	41,91	46,33	47,43	45,13	44,13	48,26
1515 080 x401 xxx	80	49,53	53,95	55,05	52,75	51,75	55,88
1515 100 x401 xxx	100	62,23	66,65	67,75	65,45	64,45	68,58

Packaging	
tape & reel with 440pcs per reel	000
samples	333

Performance level	
2	PL1: >500 mating cycles
6	PL1: >250 mating cycles
5	min. 0,06µm Au over 0,7+0,2µm PdNi

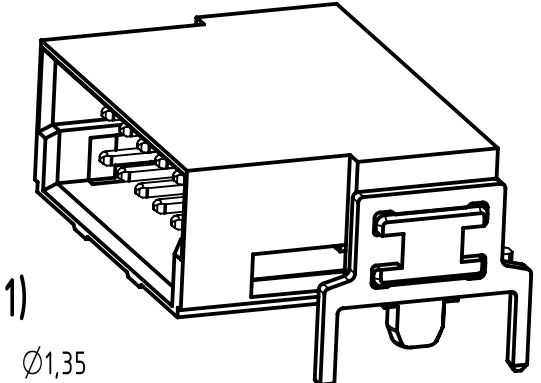

A-A (10:1)

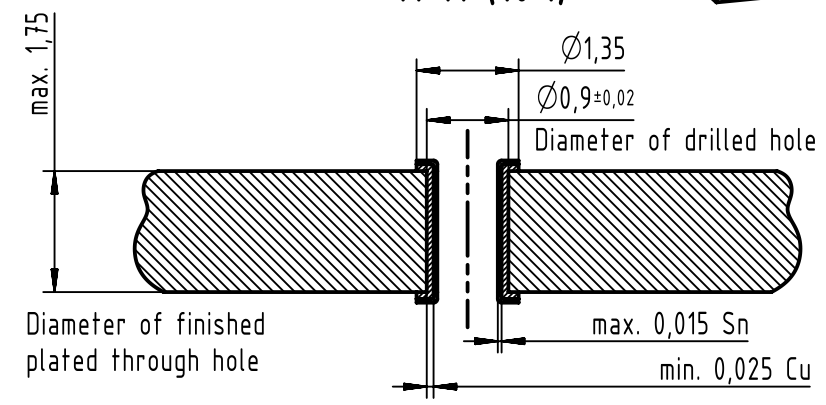

Find further technical information on the drawing DS 15151210200

	All Dimensions in mm Original Size DIN A3	Scale 5:1	Free size tol.		Ref.	
	All rights reserved Department EC PD - CN	Created by ZHUANGJ	Inspected by LUOK	Standardisation HOFFMANN	Date 2016-02-01	State Final Release
HARTING Electronics GmbH D-32339 Espelkamp	Title har-flex THR angled male	Type TB	Number 1515XXXX401XXX		Doc-Key / ECM-Nr. 100587460/UGD/002/D 50000099948	
				Rev. D	Page 1/1	