




X  
male

- 
- Shield
- |    |              |
|----|--------------|
| 1  | grey/brown   |
| 2  | white/pink   |
| 3  | brown/pink   |
| 4  | red          |
| 5  | black        |
| 6  | blue         |
| 7  | red/blue     |
| 8  | violet       |
| 9  | pink         |
| 10 | white        |
| 11 | pink/grey    |
| 12 | grey         |
| 13 | brown/yellow |
| 14 | brown        |
| 15 | white/grey   |
| 16 | yellow       |
| 17 | green        |
| 18 | white/green  |
| 19 | brown/green  |
| 20 | white/yellow |

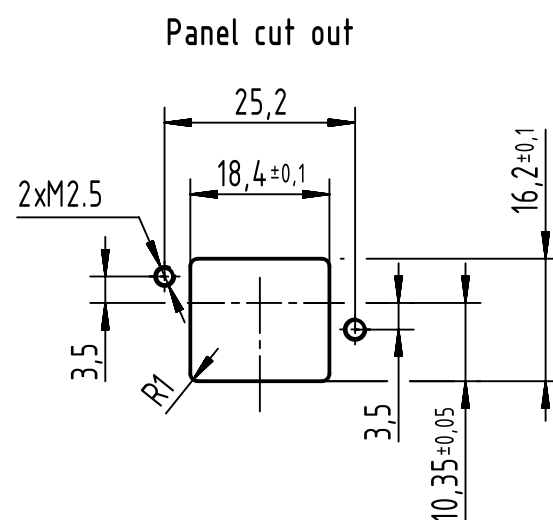

6	33221435000002	20xAWG26, Shielded Interconnection Cable	5	±0.05		
5	33221432000002		2	±0.02		
4	33221431000002		1	±0.015		
3	33221430500002		0.5			
2	33221430200002		0.2			
1	33221430100002		0.1			
Cont. no.	Part no.	Type of cable	Dim. a[m]			
 All Dimensions in mm		Tech. Character.	Free size tol.	According to production drawing		
 All rights reserved Department HCS - RO		Created by BANIUD Banciu	Inspected by COSTEA Costea	Standardisation MUNTEANV Muntean	Date 2019-05-29	State Final Release
HARTING Customised Solutions D-32339 Espelkamp		Title PP20p Compact device side				Doc-Key / ECM-Nr. 100614248/UGD/006/F 500000152562
		Type TB	Number 3322143XXX0002		Rev. F	Page 1/1