

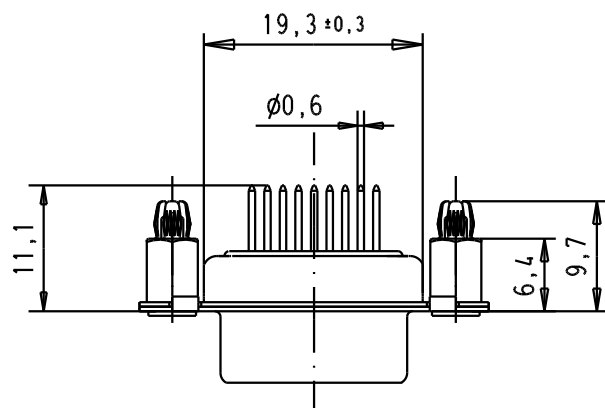
Technical drawing of a mechanical part showing dimensions and tolerances. The drawing includes a central grid of holes and two larger circular features on the left and right.



Dimensions and Tolerances:

- Overall width: 12,5
- Overall height: 2,84
- Horizontal distance from left edge to first hole center: 4,11
- Horizontal distance between first and second hole centers: 1,37
- Horizontal distance from second hole center to right edge: 9
- Horizontal distance from left edge to center of left circular feature: 2,74
- Horizontal distance from center of left circular feature to center of right circular feature: 5,49
- Horizontal distance from center of right circular feature to right edge: 9
- Left circular feature diameter: $\phi 3 \pm 0,1$
- Right circular feature diameter: $\phi 1 \pm 0,1$
- Grid hole diameter: $\phi 0,1$

Mating Cycles	500
Filter type	C
Capacitance	3900pf±20%
Working Voltage	100v
Current Rating	7.5A
Insulation Resistance	>1GΩ

FREQUENCY (MHz)	ATTENUATION (dB)
5	6dB
10	11dB
50	25dB
100	35dB
500	35dB
1000	32dB



							Dat.	Name	 All Dim. in mm Orig. Size DIN A 4	D-Sub, female, straight, 9 Poles, solder pins, tin plated shell with spacer nuts and board-locks	Mo?Mstab/ Scale 1.5:1
						Detail.	8 - JUL - 02	CV			
						Insp.					
						Stand.					
09641127246	M3		33094	04/10/05	JMDR	HARTING EURL F-95972 Paris				TB 0964112724x	Blatt/ Page 2 / 3
09641127245	UNC 4-40		31058	8 - JUL - 02	CV						
Part number	Nut thread		Mod.	Dat.	Name						