REVISION	DESCRIPTION
A	INITIAL RELEASE
B	ADDED COVERSHEET INFORMATION

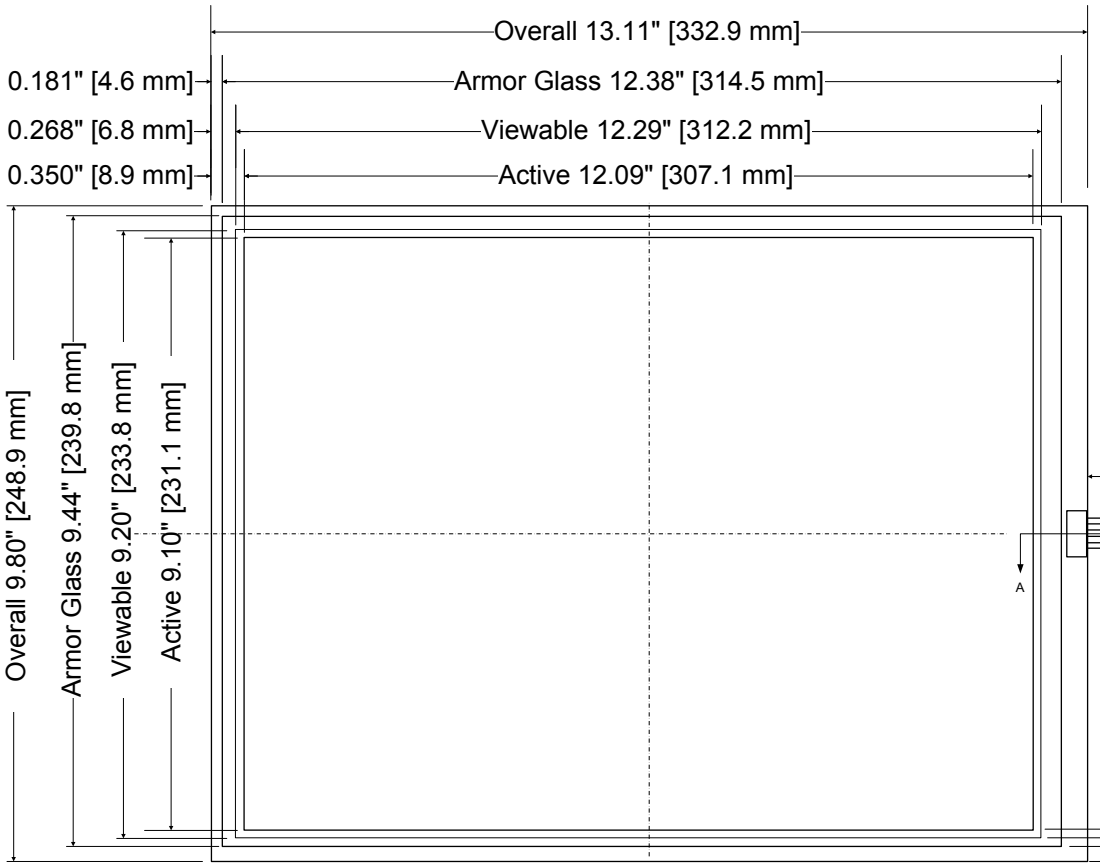

Notes:

1. CABLE TAIL: FLEX CIRCUIT POLYESTER.
2. CABLE CONNECTOR: 5 PIN FEMALE HEADER NON LATCHING CONNECTOR 0.1" CENTERS.
3. CABLE TERMINATION CENTERED ON SENSOR SIDE.
4. SENSOR THICKNESS: 0.144" [3.65 MM] NOMINAL.
5. SENSOR FACE: BOROSILICATE GLASS
6. HI-REZ ANTI GLARE TOP SURFACE FINISH
7. COVERSHEET INCLUDES 0.008" [0.20MM] PET AND 0.004" [0.10MM] BOROSILICATE GLASS
8. DOTS 0.008" [0.20MM] WIDE WITH 0.250" [6.35 MM] XY SPACING
9. LINEARITY PATTERN: PEPPER

Cable Pin Assignments

Pin	X1
1	LL
2	UL
3	Sense
4	LR
5	UR

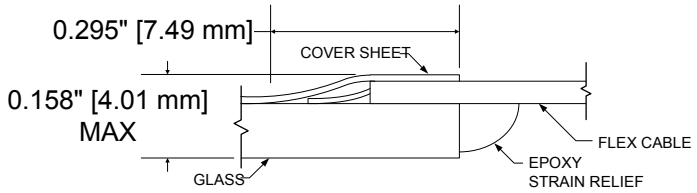

SECTION A-A

ADmetro

15.0 ULTRA

PN:3A99150

DRAWING DATE:	July 10, 2008
LAST REVISION:	July 10, 2008
DRAFTSMAN:	DZ
CHECKED BY:	
CONTRACT #:	