

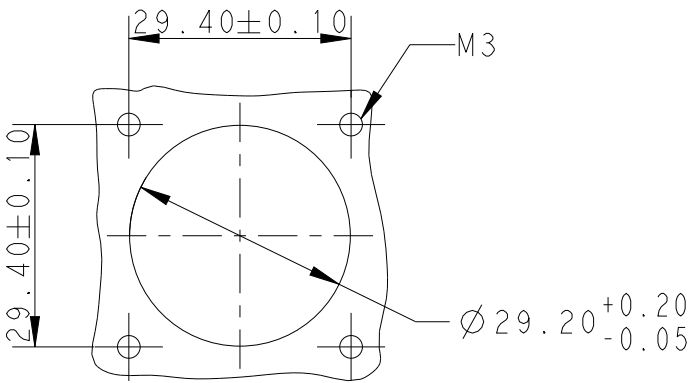
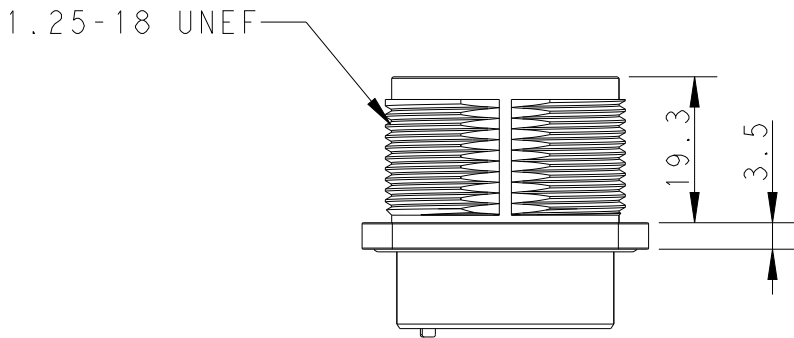
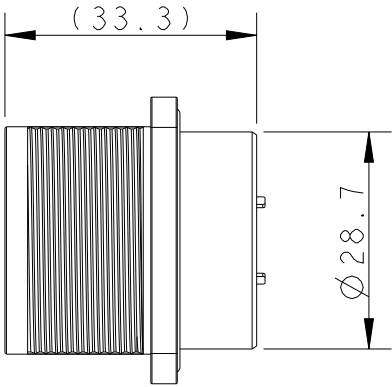


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL RELEASE	6MAY2020	RG	CW

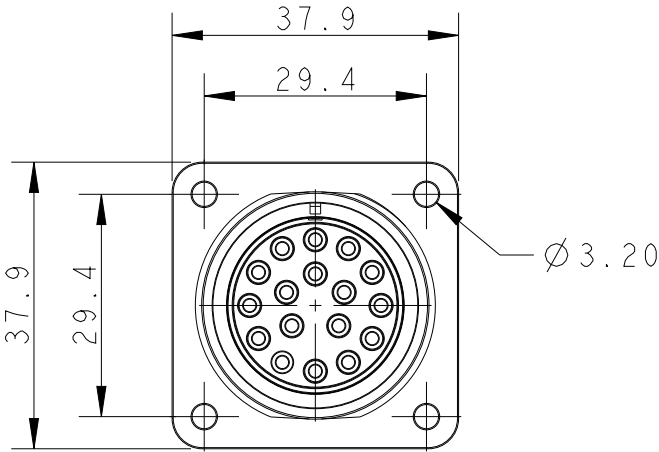

RECOMMENDED LAYOUT

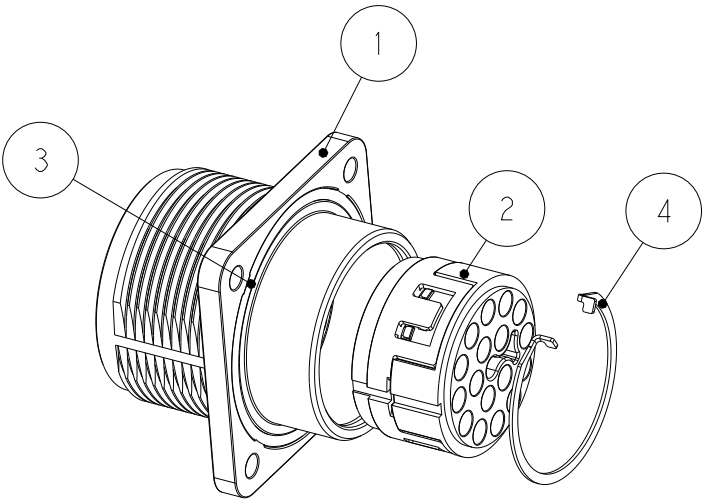




- NOTES:
- TECHNICAL CHARACTERISTICS:
RATED VOLTAGE: 500 V AC
RATED CURRENT: 13 A Max.
INSULATION RESISTANCE: 500MΩ Min.
WITHSTANDING VOLTAGE: 2 KV AC 1 MINUTE.
FLAMMABILITY: UL94V-0
MATING CYCLES: 500 CYCLES
CONTACT TYPE: CRIMP CONTACT
WIRE RANGE: 0.14-1.0mm² (26-18 AWG)
 - CONTACT NEED TO BE ORDERED SEPARATELY.
 - UL CERTIFICATED.

- 注释:
- 技术参数:
额定电压: 500V AC
额定电流: 13A Max.
绝缘电阻: 500MΩ Min.
耐电压: 2 KV AC 1分钟.
阻燃等级: UL94V-0.
插拔次数: 500次.
接线类型: 冷压接.
接线范围: 0.14-1.0mm² (26-18 AWG)

- 端子需要单独订购.
- UL 认证.

PART NUMBER 2374417-1

4	LOCKING RING	STAINLESS STEEL
3	SEALING RING	SYNTHETIC RUBBER
2	INSERT	POLYMER
1	SHELL	ZINC ALLOY
ITEM	DESCRIPTION	MATERIAL

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN Robert Gan 6MAY2020	<div>TE Connectivity</div> <div>N GEN ECONECT 20-29 RECEPTACLE KIT</div>		
DIMENSIONS: mm		CHK Gino Yao 6MAY2020			
		APVD Chris Wang 6MAY2020			
		PRODUCT SPEC 108-137506			
		APPLICATION SPEC 114-137506	NAME		
		WEIGHT -	SIZE A3	CAGE CODE 00779	DRAWING NO C-2374417
MATERIAL -		FINISH -	RESTRICTED TO -		
-		-	SCALE 1:1 SHEET 1 OF 1 REV A		