
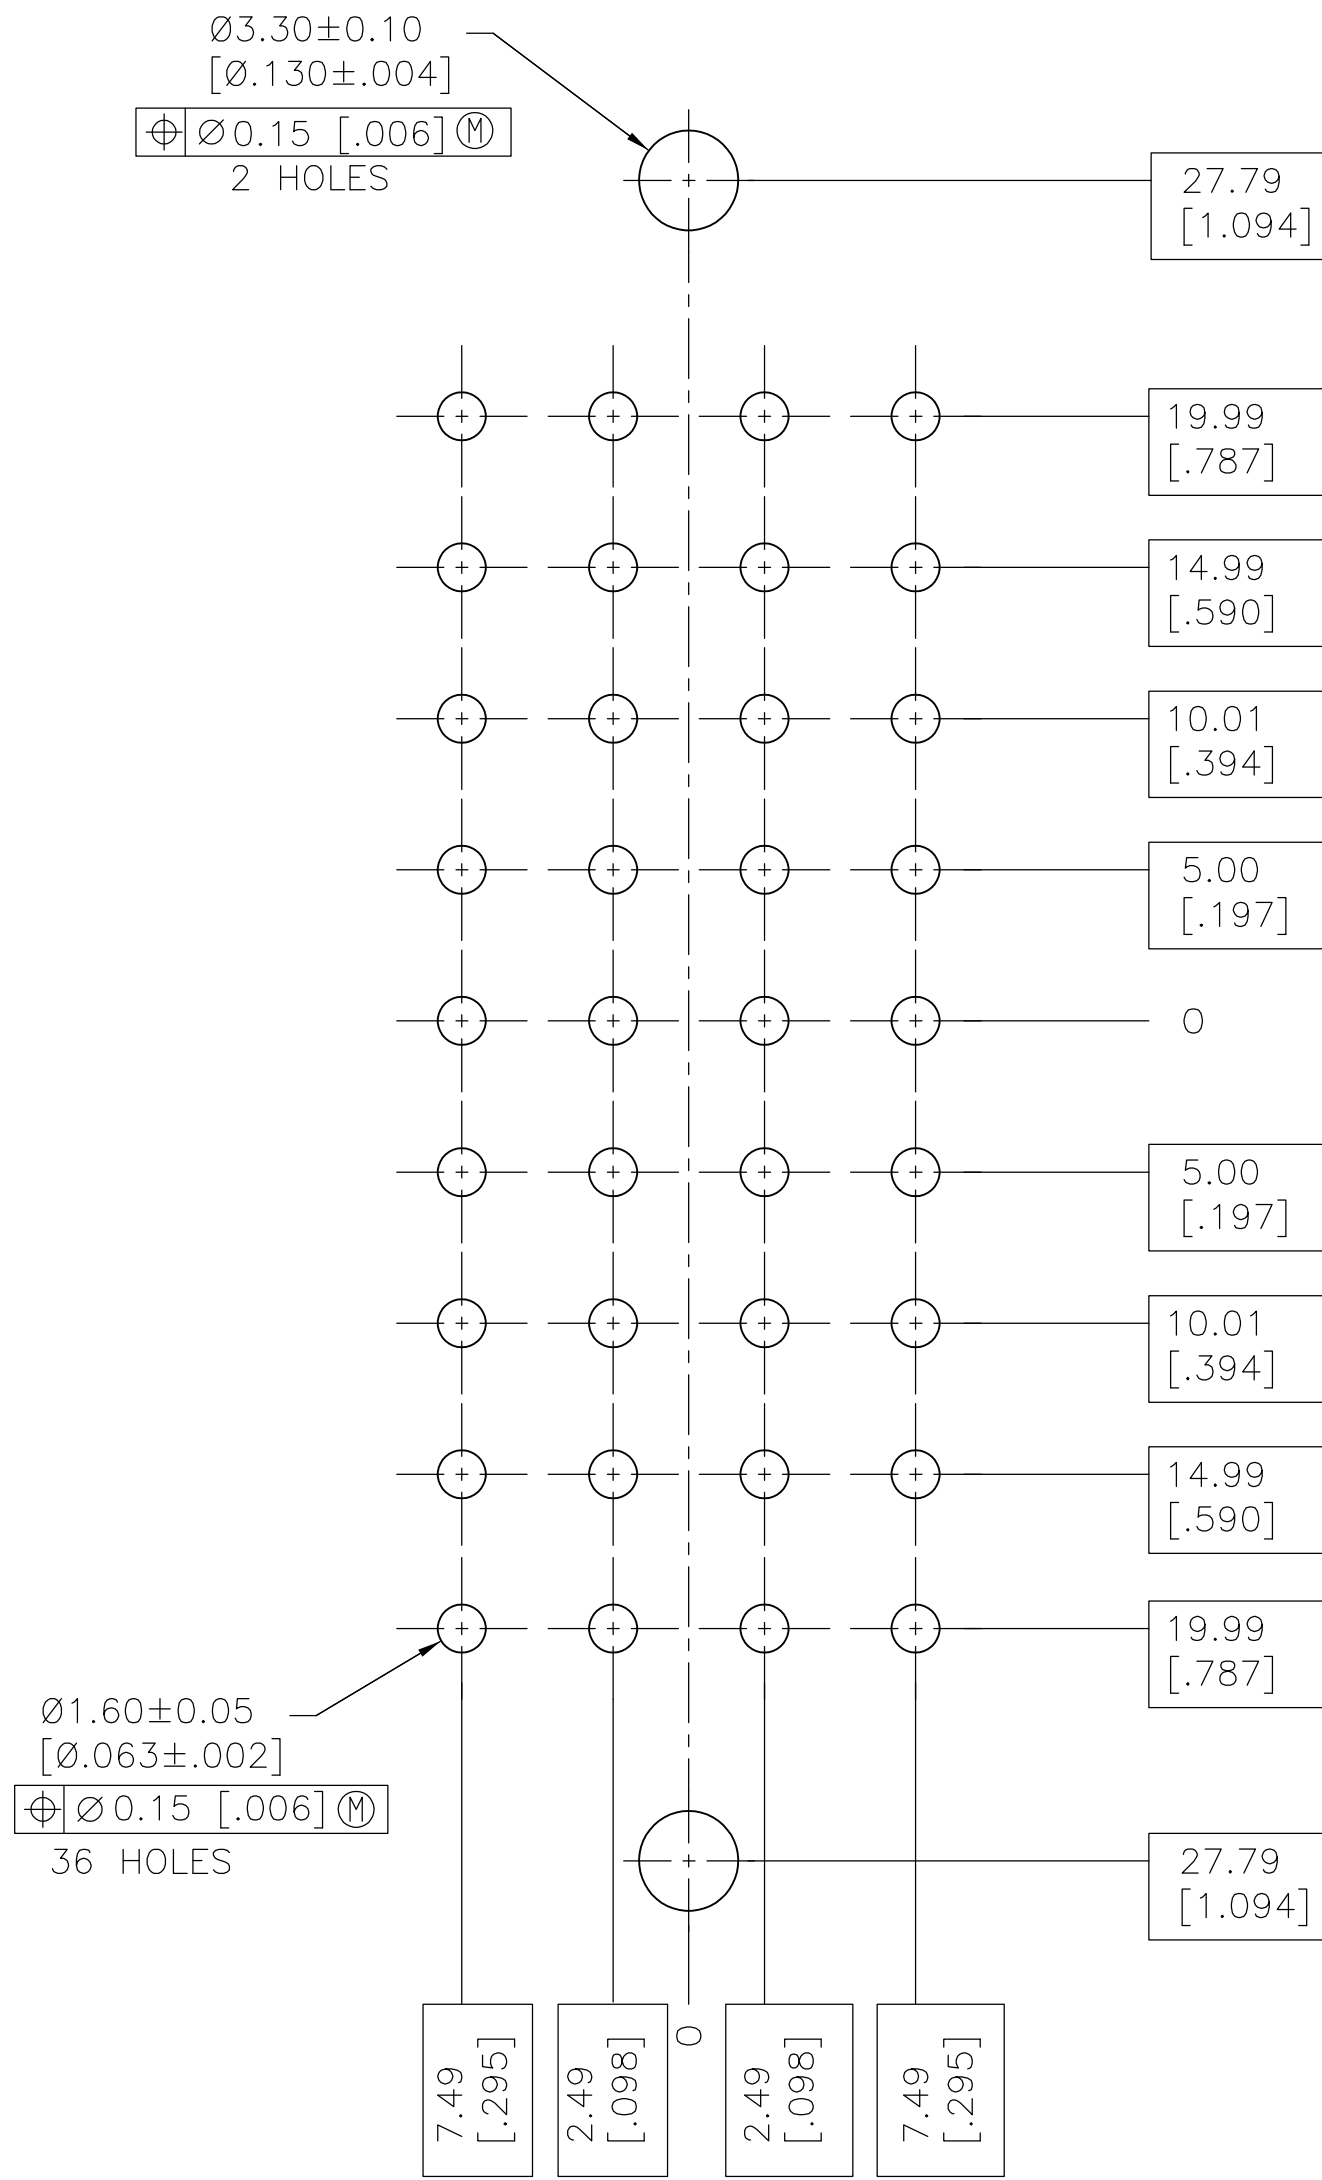
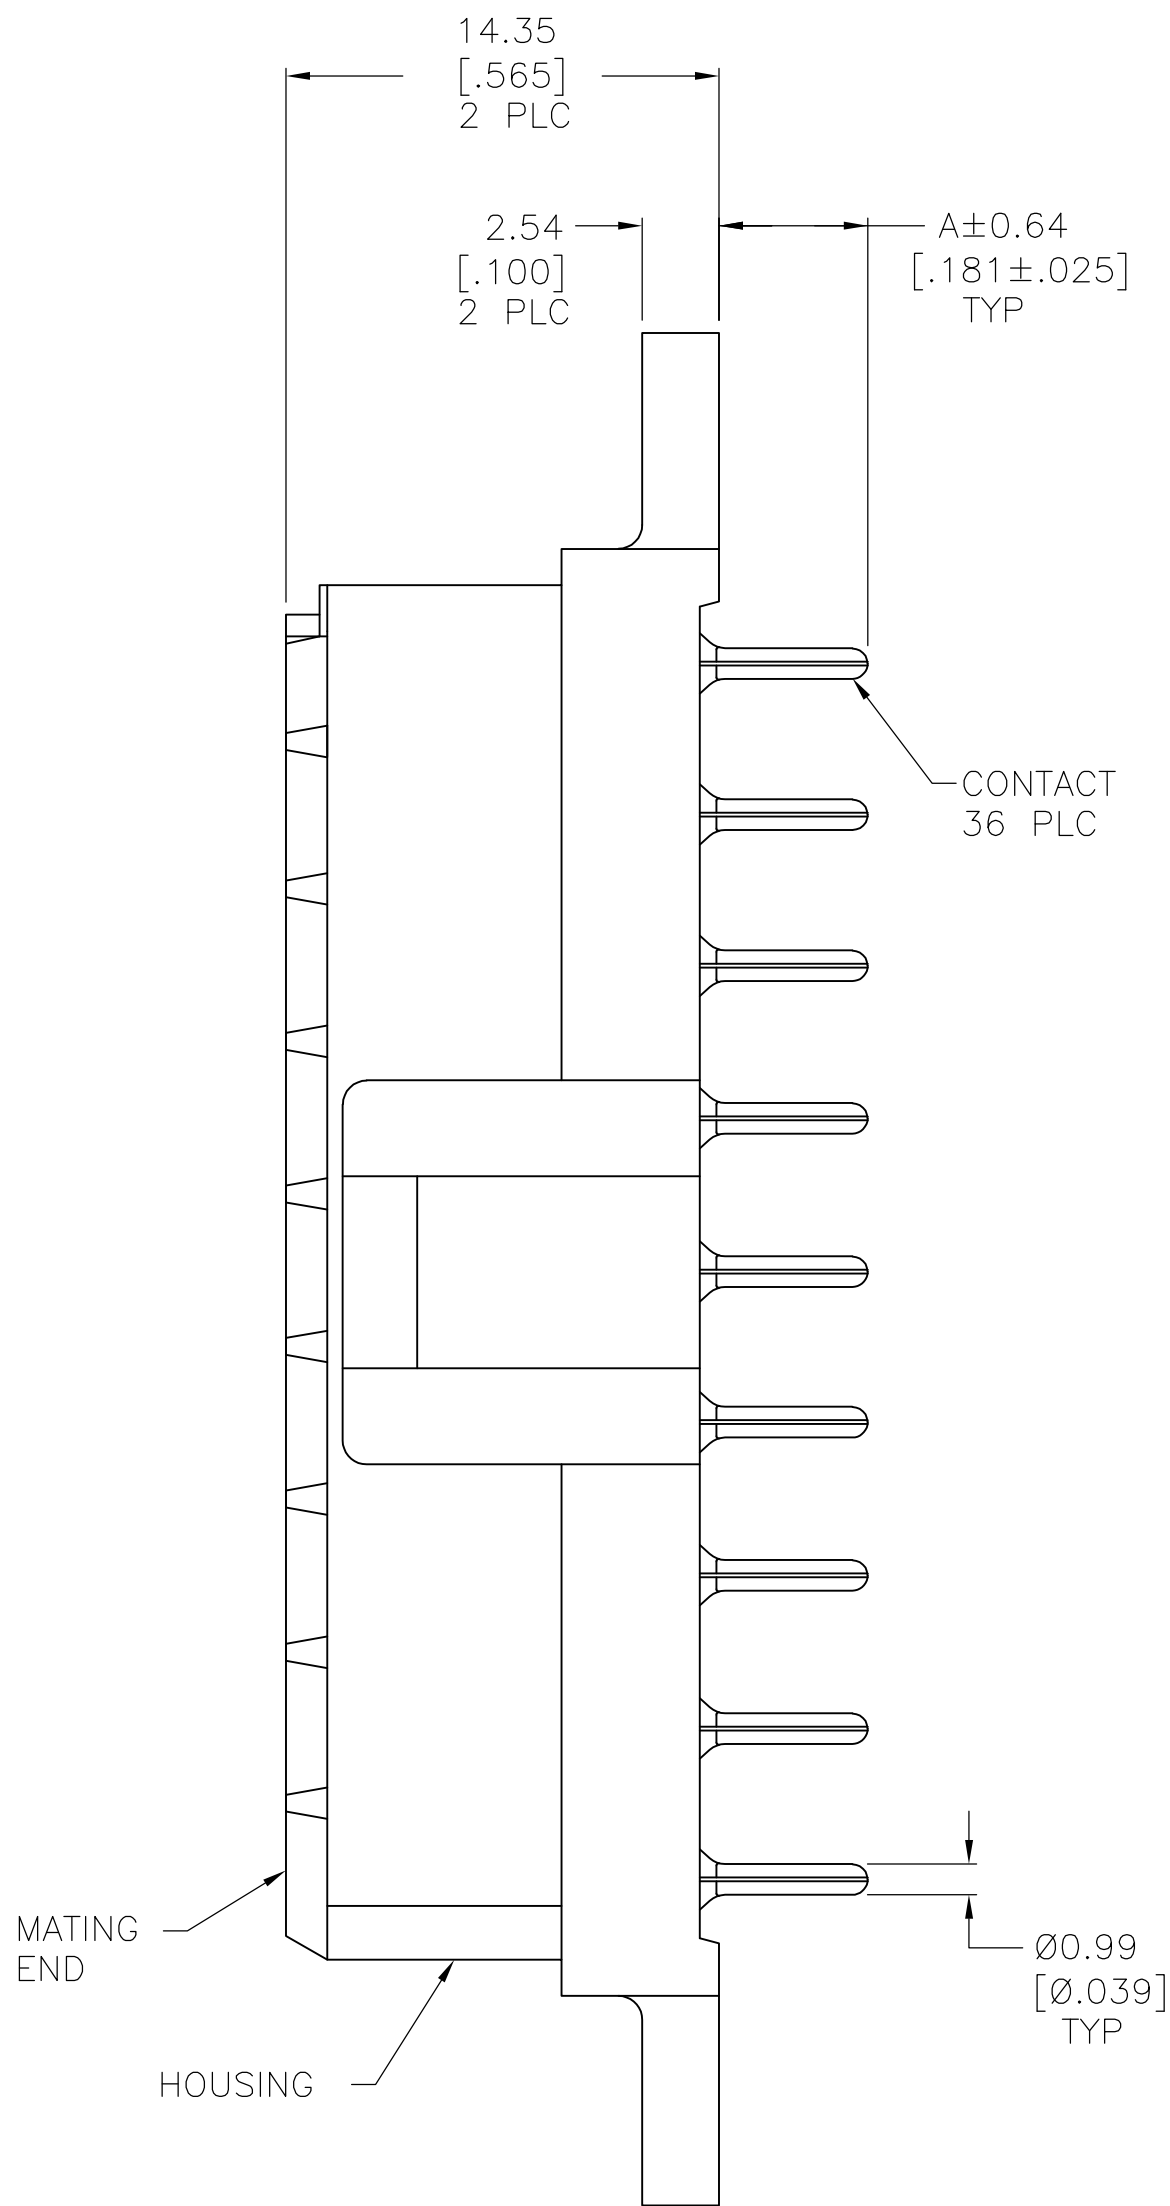


D

C

B


A

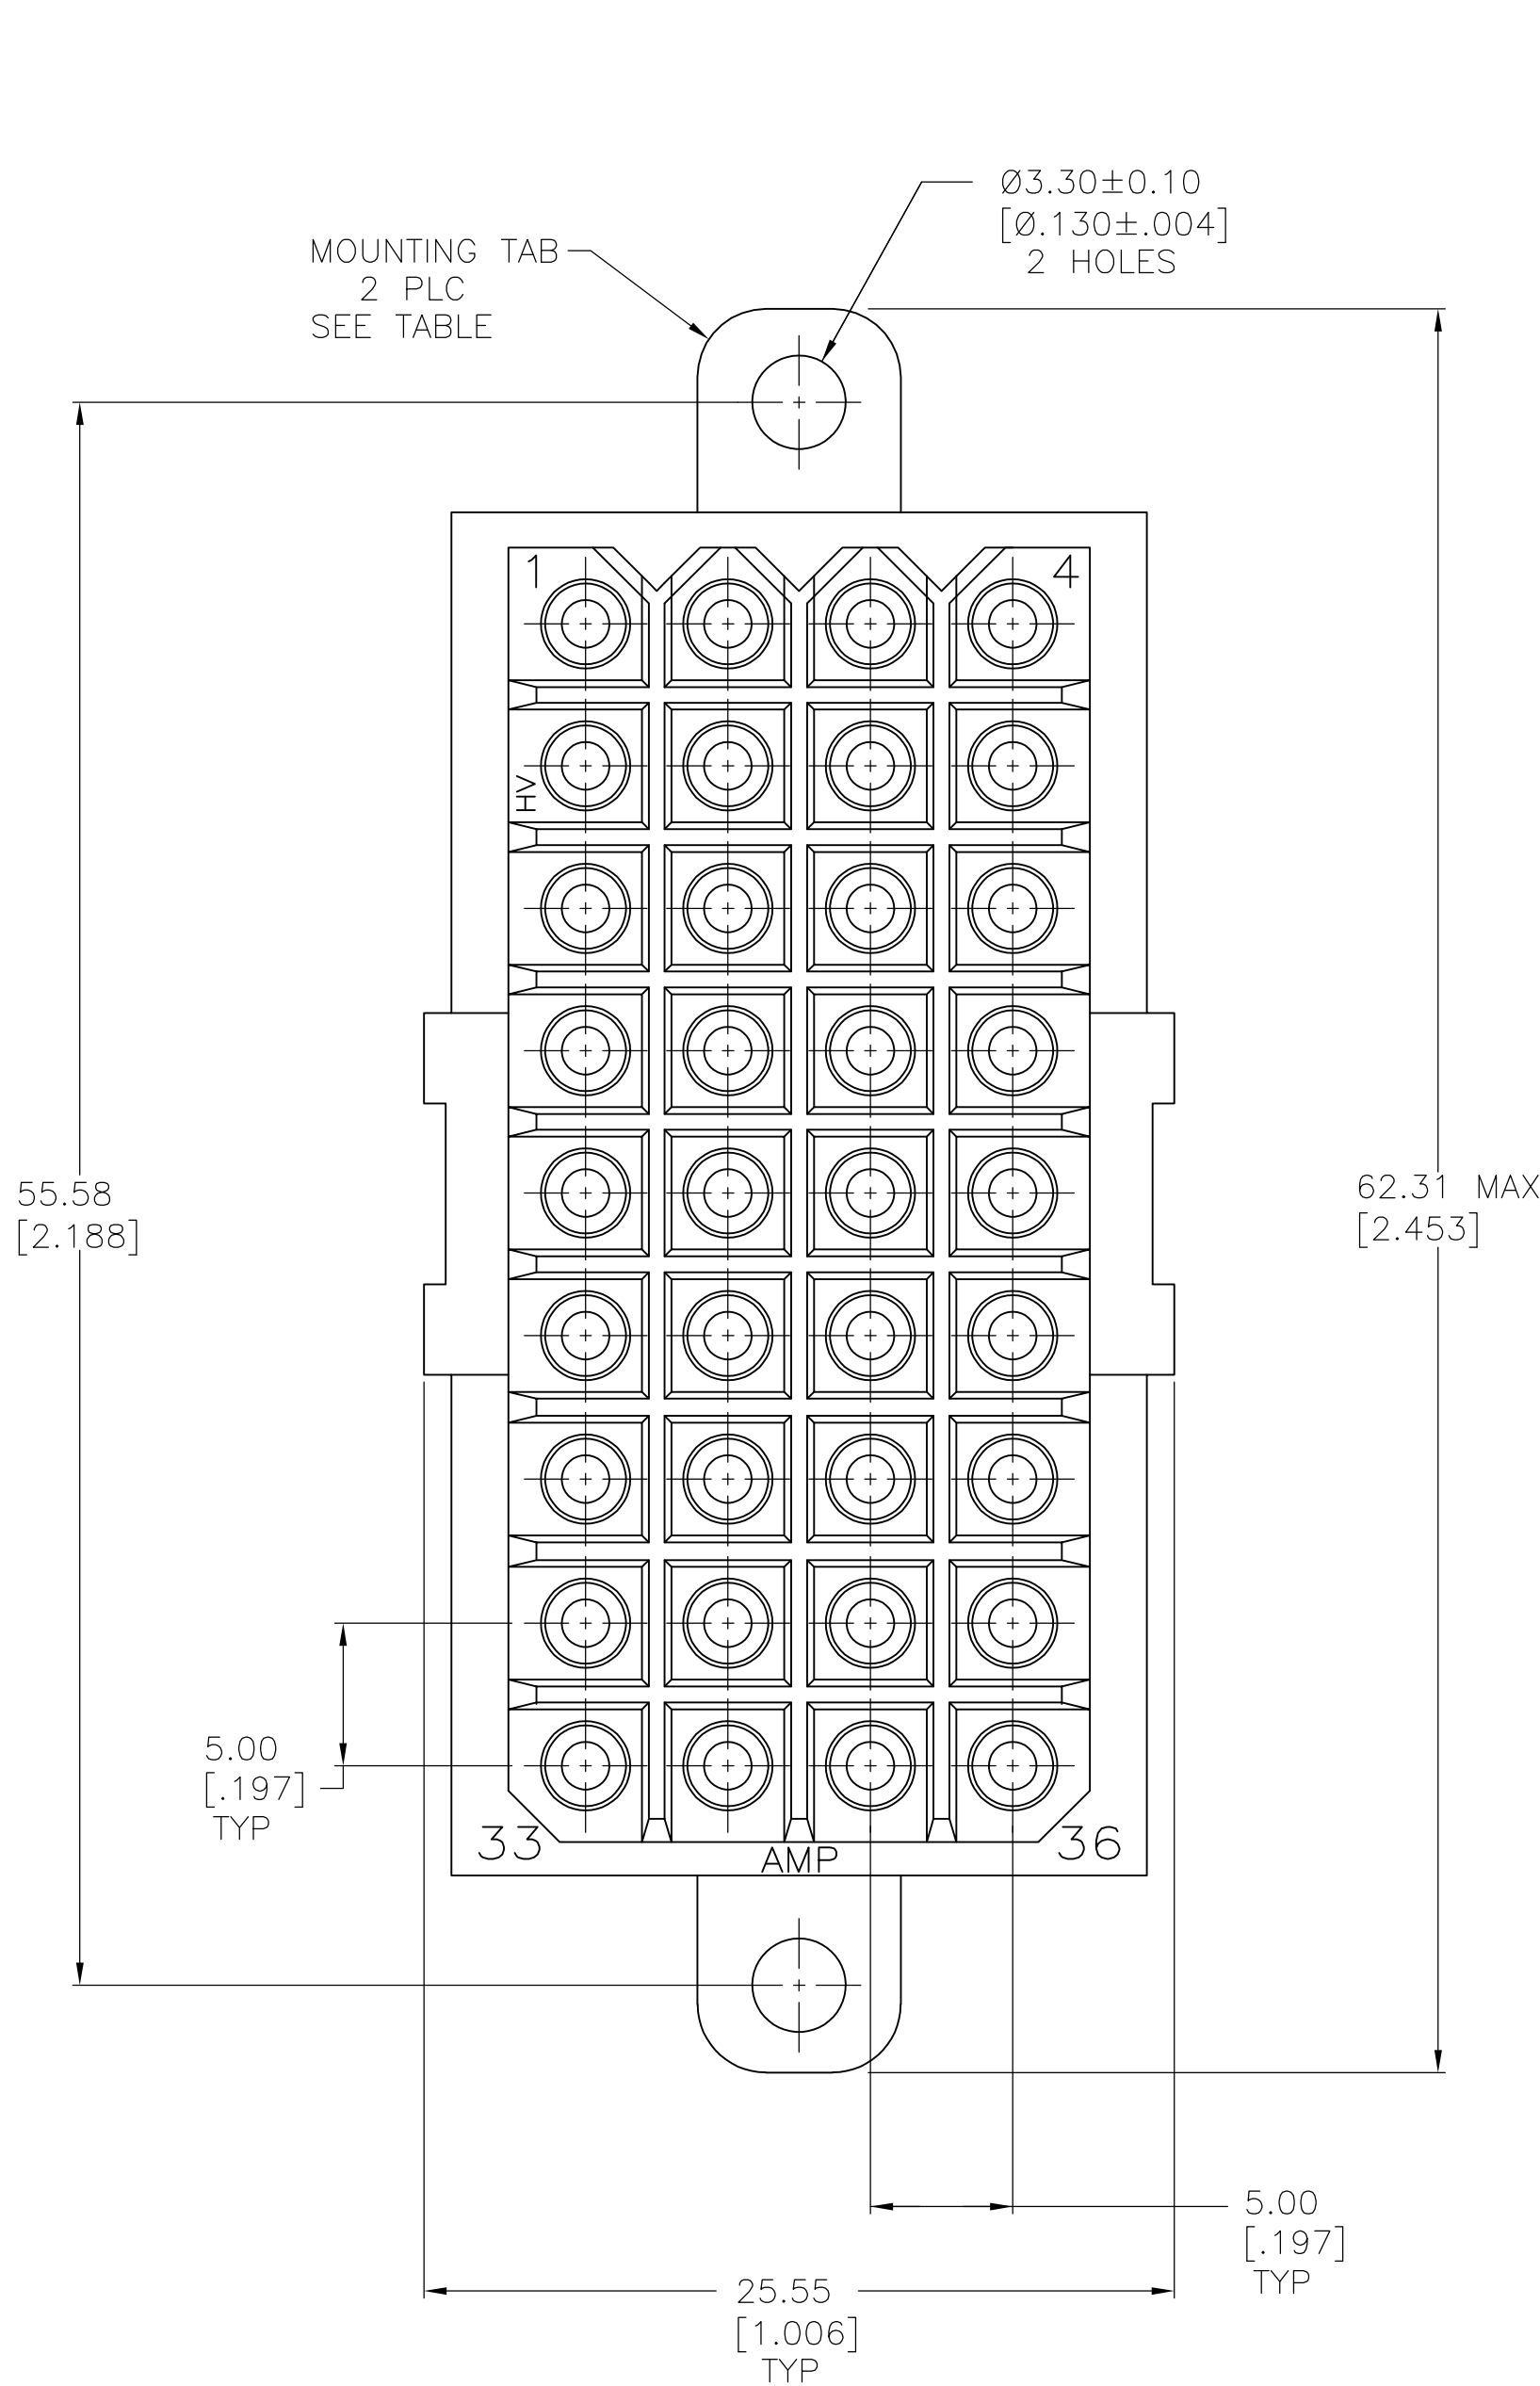

RECOMMENDED LAYOUT

- 1 NYLON, UL 94-V0 RATED, RED.
- 2 PHOSPHOR BRONZE.
- 3 3.81  $\mu$ m [.000150] MIN TIN-LEAD OVER 1.27  $\mu$ m [.000050] MIN NICKEL.
- 4 0.76  $\mu$ m [.000030] MIN GOLD FOR A LENGTH OF 4.95 [.195] MIN FROM MATING END 3.81  $\mu$ m [.000150] MIN TIN-LEAD FOR A LENGTH OF 4.88 [.192] MIN ON OPPOSITE END, BOTH OVER 1.27  $\mu$ m [.000050] MIN NICKEL.
- 5 .000150 MIN LEAD FREE TIN OVER .000050 MIN NICKEL.
- 6 0.76  $\mu$ m [.000030] MIN GOLD FOR A LENGTH OF 4.95 [.195] MIN FROM MATING END 3.81  $\mu$ m [.000150] MIN TIN FOR A LENGTH OF 4.88 [.192] MIN ON OPPOSITE END, BOTH OVER 1.27  $\mu$ m [.000050] MIN NICKEL.
- 7 PRILIMINARY PART NUMBER.
- 8 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI.

<div>7</div> <div>8</div> OBSOLETE	3.50[.137]	4.60[.181]	<div>6</div>	YES	1-207534-2
			<div>6</div>	NO	1-207534-1
<div>6</div>			YES	1-207534-0	
<div>5</div>			NO	207534-9	
<div>5</div>			YES	207534-8	
<div>4</div>			NO	207534-4	
<div>4</div>			YES	207534-3	
<div>3</div>			NO	207534-2	
<div>3</div>			YES	207534-1	
<div>7</div> <div>8</div> OBSOLETE			A	CONTACT FINISH	MOUNTING TABS
OBSOLETE					

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN03/20/92	<div>TE</div> TE Connectivity			
		L.SIPE3-25-92				
		CHKR.STONE	NAME			
		APVDA.TRAVIS3-25-92				
DIMENSIONS: mm [INCHES]		PRODUCT SPEC				
		108-10033				
		APPLICATION SPEC				
		—				
MATERIAL		WEIGHT	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
HOUSING: 1			A1	00779	C207534	—

TOLERANCES UNLESS OTHERWISE SPECIFIED:		CUSTOMER DRAWING	
0 PLC ± —		SCALE	4:1
1 PLC ± —		SHEET	1 OF 1
2 PLC ± 0.25 [010]		REV	N
3 PLC ± —			
4 PLC ± —			
ANGLES ± —			
FINISH	CONTACT: SEE TABLE		