
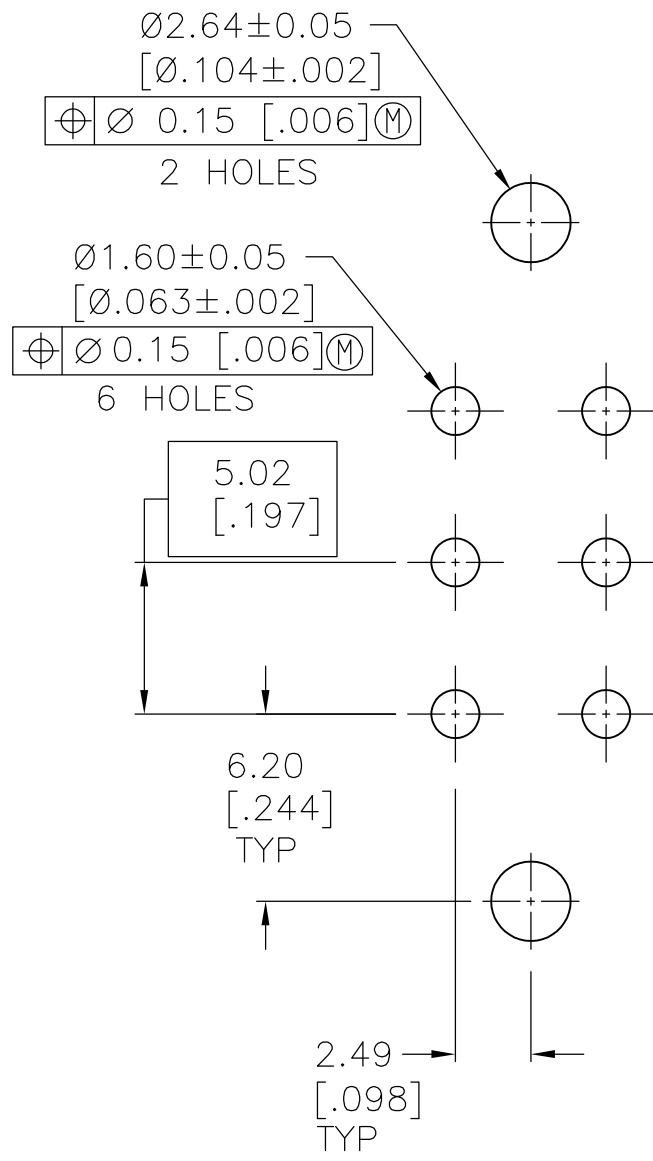


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	V	REVISED PER ECO-16-004940	29JUL2016	NK	MZ

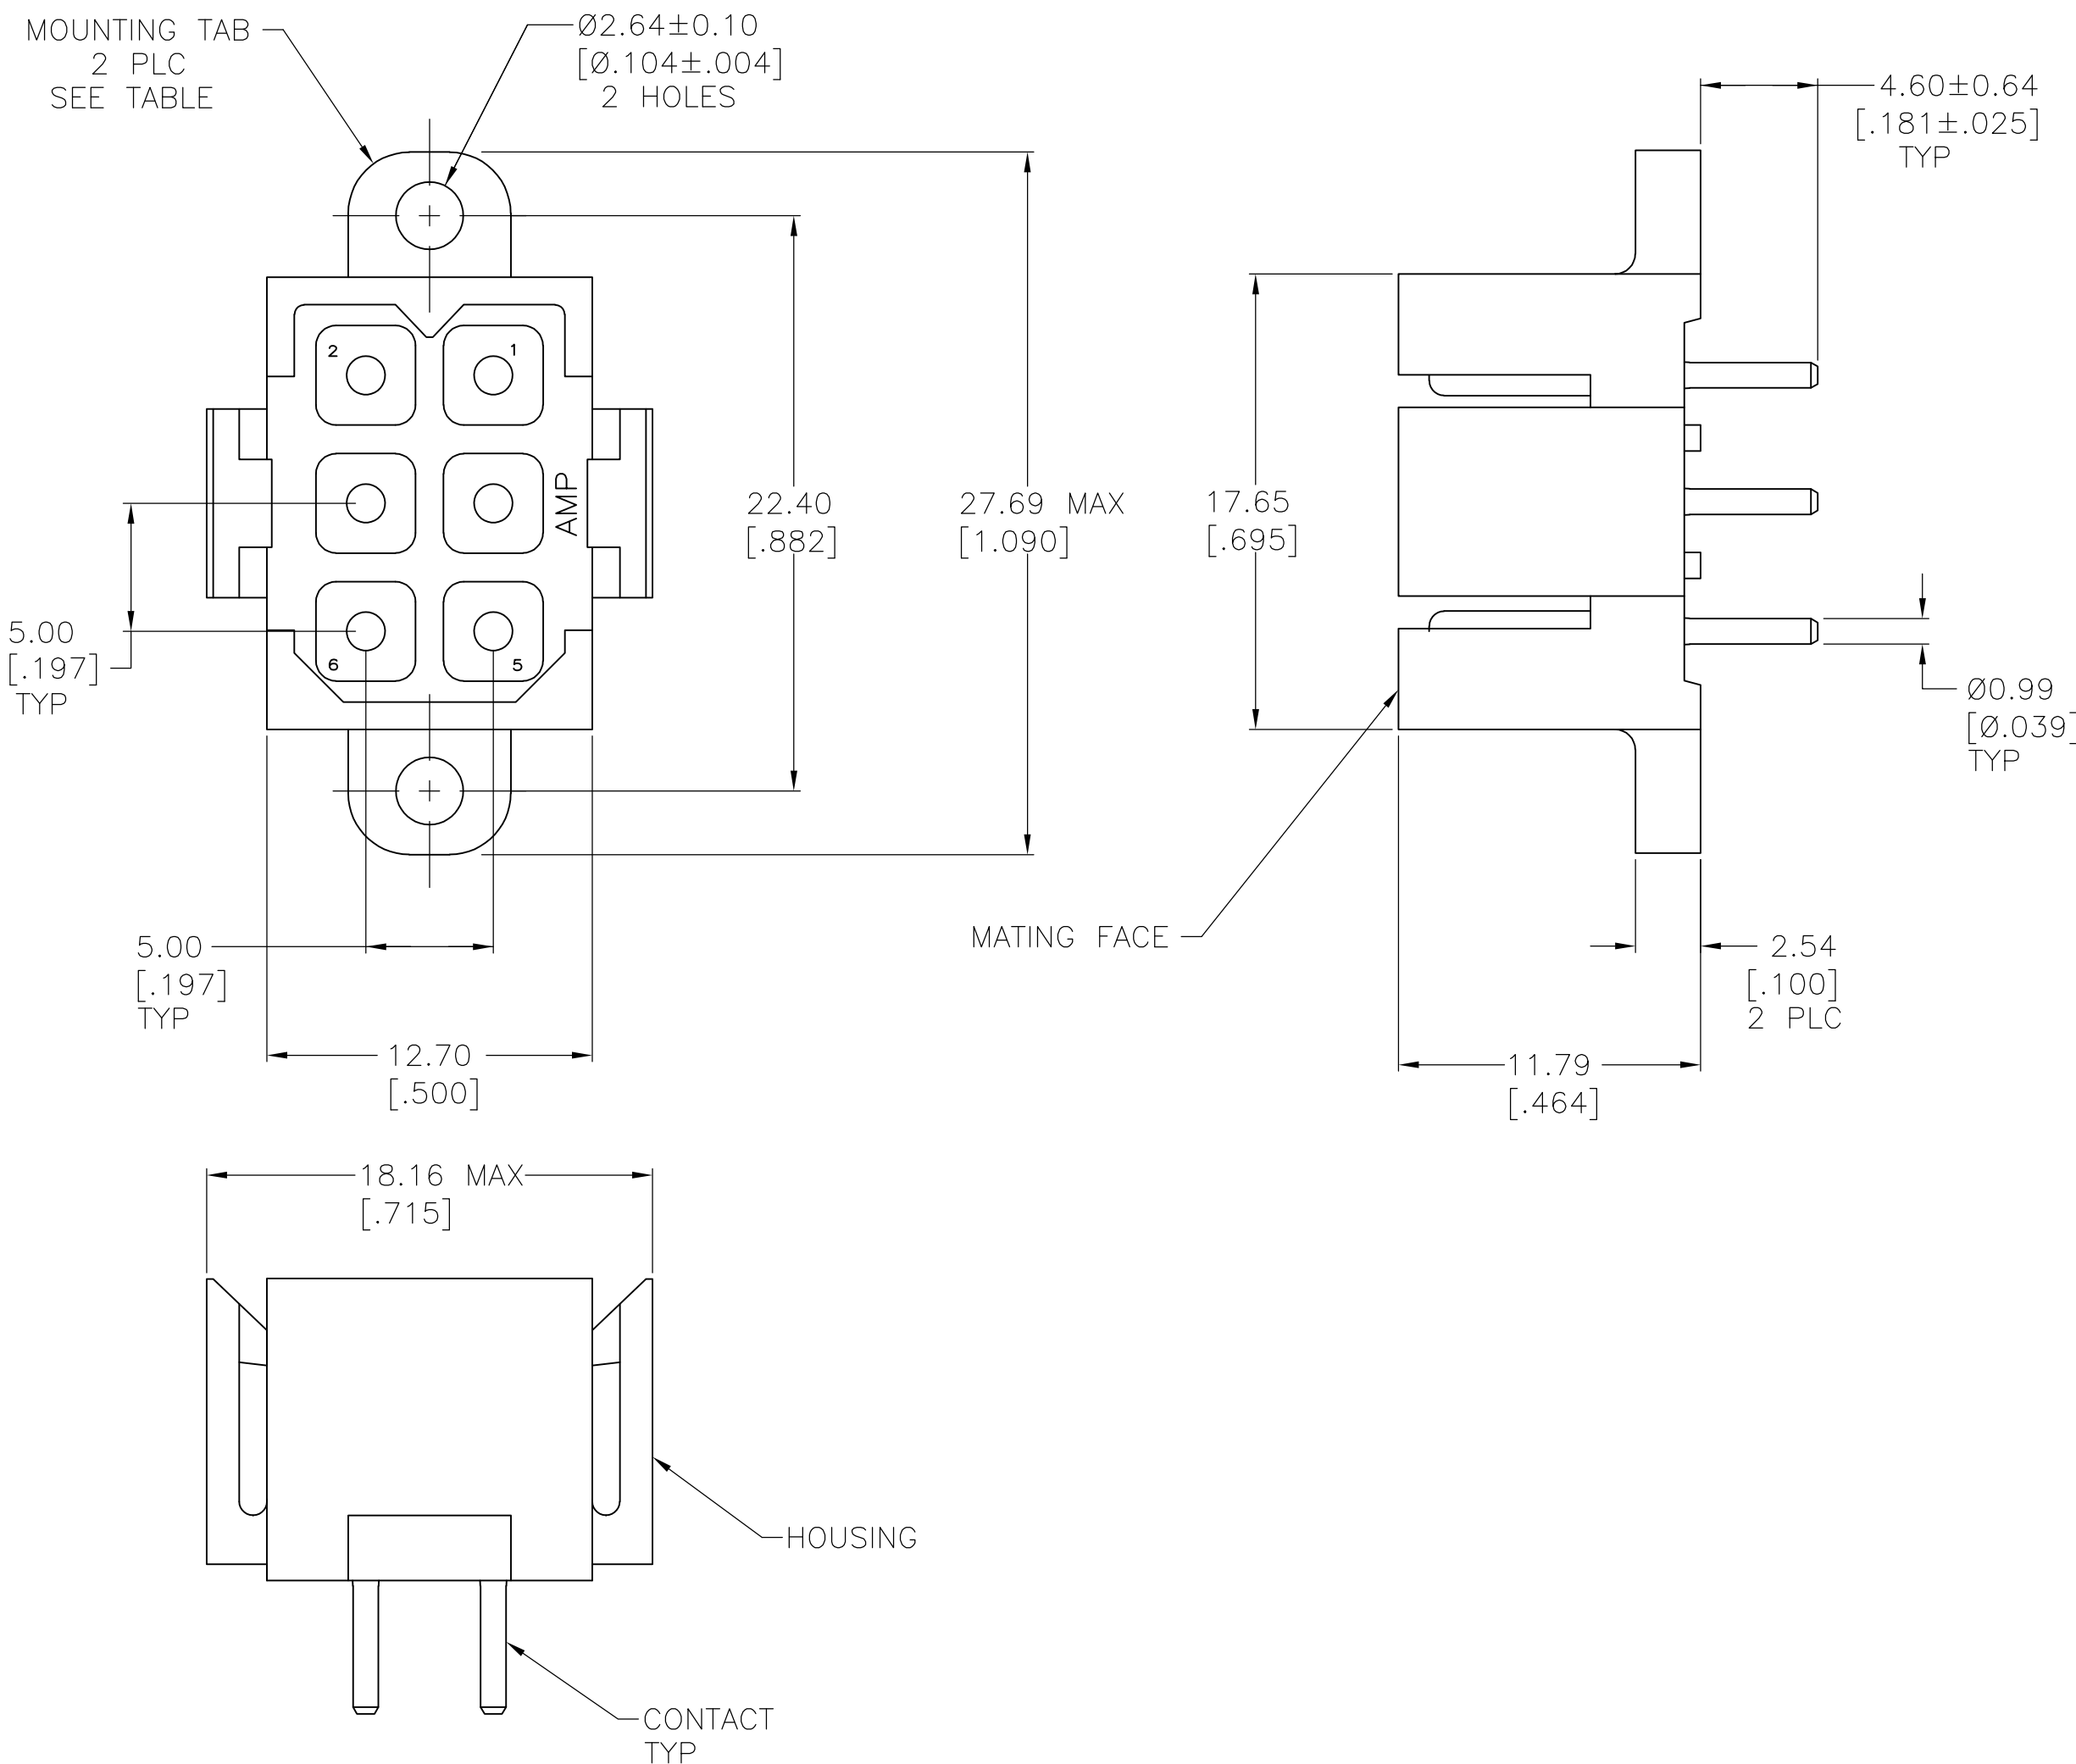

- 1

NYLON, UL 94V-0 RATED, RED.
- 2

BRASS PER ASTM B36.
- 3

3.81um [.000150] MIN TIN OVER 2.54um [.000100] MIN COPPER.
- 4

0.76um [.000030] MIN GOLD FOR A LENGTH OF 5.08 [.200] FROM MATING END, 3.81um [.000150] MIN TIN FOR A LENGTH OF 4.83 [.190] MIN FROM OPPOSITE END, BOTH OVER 1.27um [.000050] MIN NICKEL.
- 5

.000150 MIN TIN OVER .000100 MIN CU, OR .000050 MIN NICKEL.
- 6

0.76um [.000030] MIN GOLD FOR A LENGTH OF 5.08 [.200] FROM MATING END, 3.81um [.000150] MIN TIN FOR A LENGTH OF 4.83 [.190] MIN FROM OPPOSITE END, BOTH OVER 1.27um [.000050] MIN NICKEL.

	<div>6</div>	NO	1-207158-1
	<div>6</div>	YES	1-207158-0
	<div>5</div>	NO	207158-8
	<div>5</div>	YES	207158-7
	<div>4</div>	NO	207158-4
	<div>4</div>	YES	207158-3
	<div>3</div>	NO	207158-2
	<div>3</div>	YES	-207158-1-
OBSOLETE			
	CONTACT FINISH	MOUNTING TABS	PART NO

A CONTROLLED DOCUMENT.		DWN L.SIPE 03/10/92	<div>STE</div> <div>TE Connectivity</div>					
		CHK R.STONE 3-17-92						
<div>TOLERANCES UNLESS OTHERWISE SPECIFIED:</div> <div><div></div><div>0 PLC ± -</div><div>1 PLC ± -</div><div>2 PLC ± 0.25 [.010]</div><div>3 PLC ± -</div><div>4 PLC ± -</div><div>ANGLES ± -</div><div>FINISH</div></div>		APVD A.TRAVIS 3-17-92	NAME					
		PRODUCT SPEC 108-10033	PIN HEADER ASSEMBLY, 6 POSITION, METRIMATE					
		APPLICATION SPEC						
		—	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO		
CONTACT: SEE TABLE		WEIGHT	A2	00779	C-207158	—		
CUSTOMER DRAWING			SCALE	4:1	SHEET	1 OF 1	REV	V