

REVISIONS


P	LTR	DESCRIPTION	DATE	DWN	APVD
A		INITIAL	05Jan2015	GY	CW
A1		ECR-15-004309	24Mar2015	GY	CW
B		ECR-15-013759	10Oct2015	DW	CW
B1		ECR-16-015492	17NOV2016	QY	CW

NOTES:



- TECHNICAL CHARACTERISTICS:
 INSULATION MATERIAL: PC
 RATED VOLTAGE: 500V
 RATED CURRENT: 16A
 INSULATION RESISTANCE: $\geq 400M\Omega$
 RATED IMPULSE VOLTAGE: 6KV
 POLLUTION DEGREE: 3
 FLAMMABILITY: UL94V-0
 MATING CYCLES: 500 CYCLES
 WIRE RANGE: $0.14mm^2 \sim 4mm^2$ (AWG26-AWG12)
 CONTACT TYPE: CRIMP CONTACT
- CONTACTS NEED TO BE ORDERED SEPARATELY.
 (ORDER No. REFER TO DRAWING: T20300X20XX000)

注释:



- 技术参数:
 绝缘材料: PC
 额定电压: 500V
 额定电流: 16A
 绝缘电阻: $\geq 400M\Omega$
 脉冲电压: 6KV
 污染等级: 3
 阻燃等级: UL94V-0
 插拔次数: 500次
 接线范围: $0.14mm^2 \sim 4mm^2$ (AWG26-AWG12)
 接线类型: 冷压接
- 端子需要单独订购。
 (订货号参考图面: T20300X20XX000)

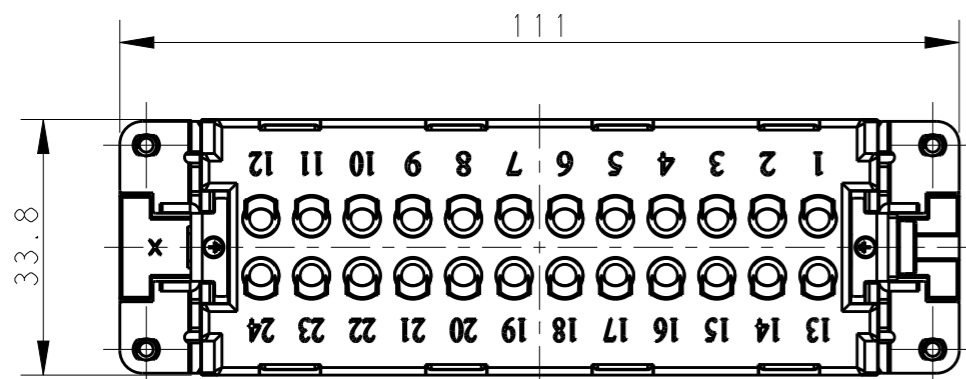


M4 SCREW, RECOMMENDED
 TIGHTENING TORQUE 1.2Nm
 M4螺丝, 推荐锁紧力矩 1.2Nm

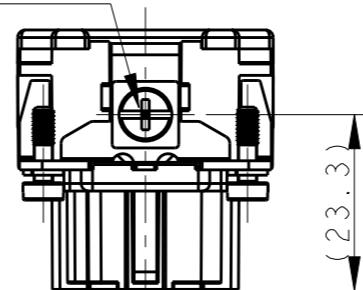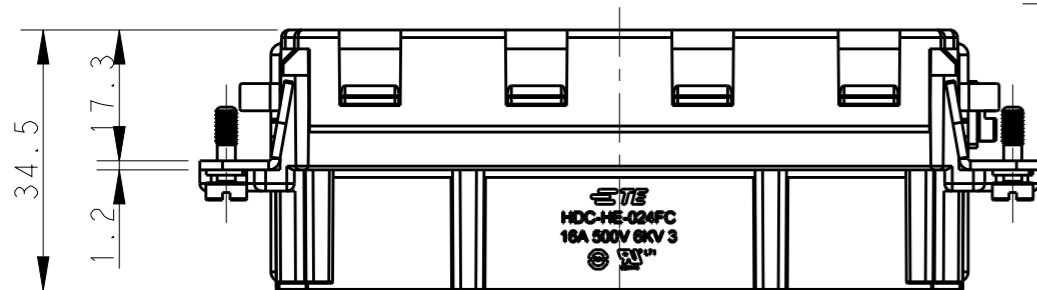

4X M3 SCREW, RECOMMENDED
 TIGHTENING TORQUE 0.5Nm
 4X M3螺丝, 推荐锁紧力矩 0.5Nm

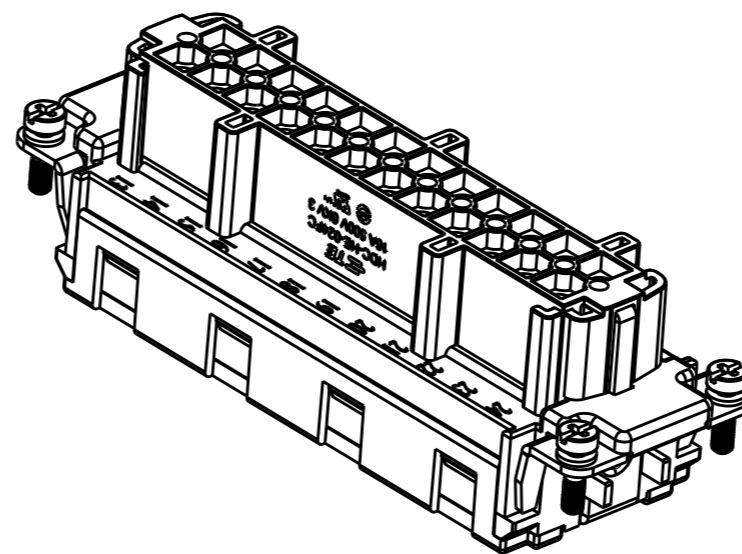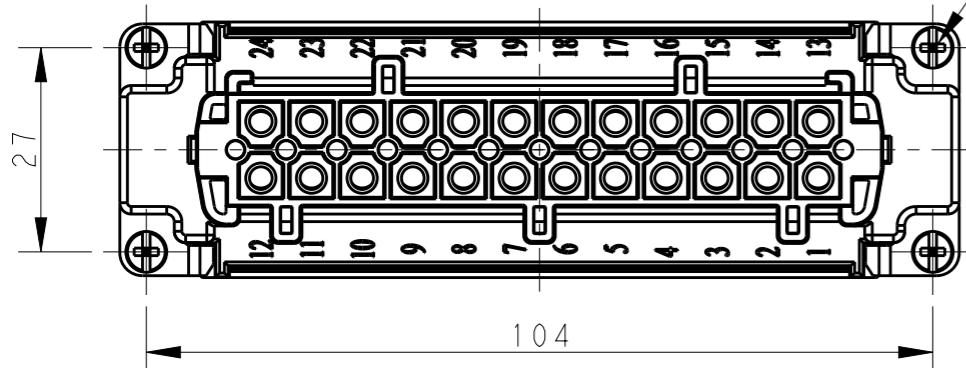

TYPE-1, T2040244201-000, TE LOGO
 类型-1, T2040244201-000, TE LOGO

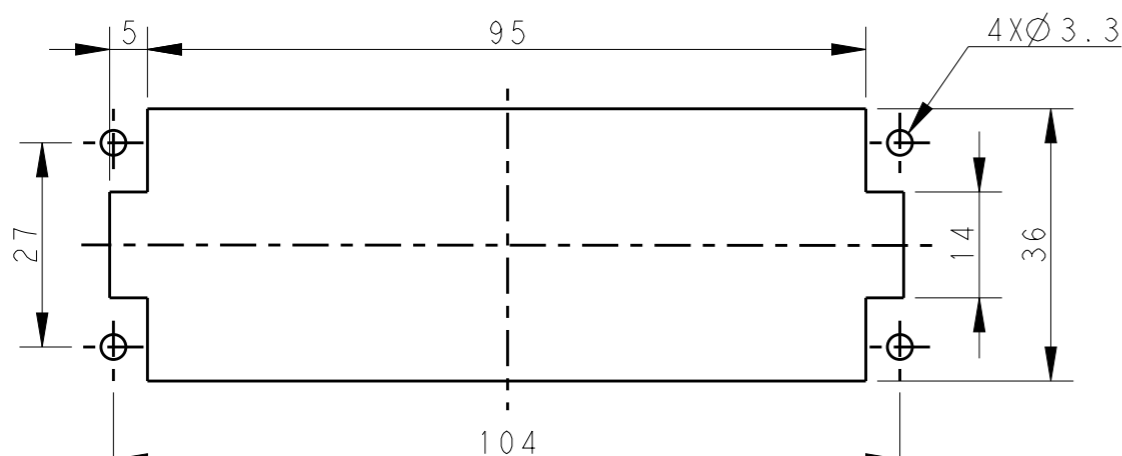


PANEL CUT FOR INSERTS FOR USING
 WITHOUT HOODS/ HOUSINGS
 不使用防护外壳时芯件的安装开孔图




THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN Gino.Yao 20Aug2014		TE Connectivity	
DIMENSIONS: mm		CHK Chris.Wang 20Aug2014			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD Xiang.Xu 20Aug2014		NAME HE-024-FC	
0 PLC ±-		PRODUCT SPEC 108-137044		SIZE	
1 PLC ±-		APPLICATION SPEC 114-137044		CAGE CODE	
2 PLC ±-		WEIGHT -		DRAWING NO	
3 PLC ±-		CUSTOMER DRAWING		A300779	
4 PLC ±-		SCALE 1:1		SHEET 1 OF 2	
ANGLES ±-		RESTRICTED TO -		REV B1	
FINISH -		DRAWING NO T2040244201000		REV B1	
MATERIAL -		SCALE 1:1		SHEET 1 OF 2	
FINISH -		RESTRICTED TO -		REV B1	

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
 © COPYRIGHT 20 BY - ALL RIGHTS RESERVED.


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
-		SEE SHEET 1	-	-	-

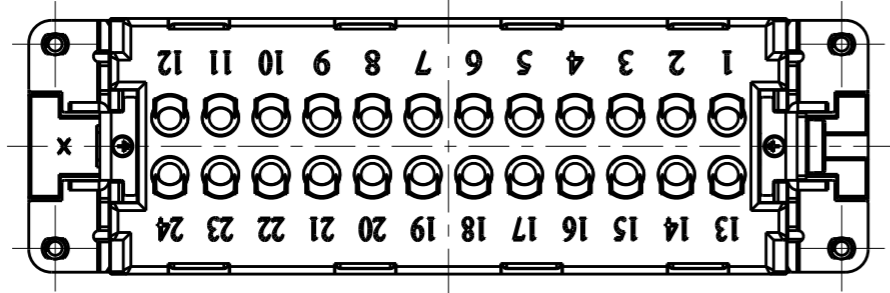

NOTE:
SEE SHEET 1
注释:
见页 1

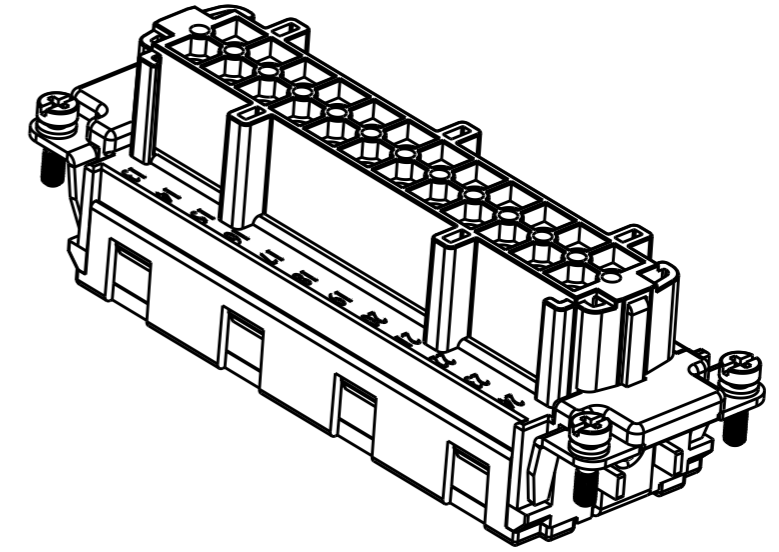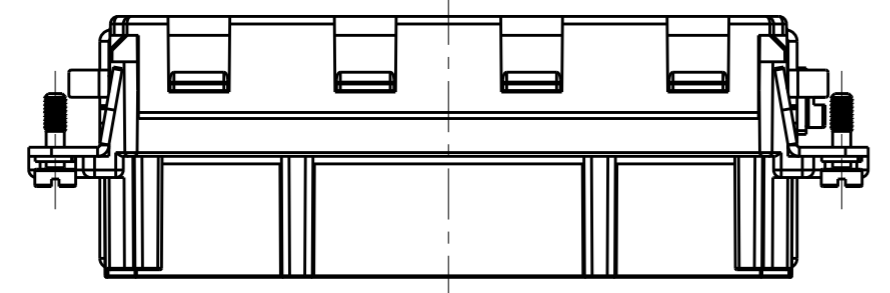


TYPE-2, T2040244201-001, STAINLESS STEEL SCREW, NO LOGO
 类型-2, T2040244201-001, 不锈钢螺丝, 无LOGO

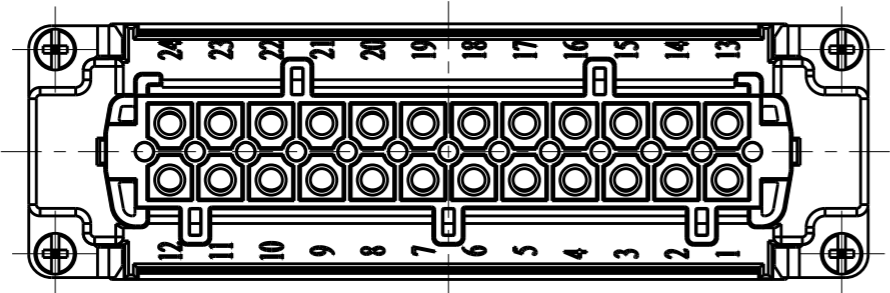

T2040244201-001	HE-024-FC	HE-024 FEMALE INSERT, CRIMPING, STAINLESS STEEL SCREW, NO LOGO HE-024母插, 冷压针, 不锈钢螺丝, 无LOGO	TYPE-2 类型-2
T2040244201-000	HE-024-FC	HE-024 FEMALE INSERT, CRIMPING HE-024母插, 冷压针	TYPE-1 类型-1
PART NUMBER 料号	PART DESCRIPTION 描述		TYPE 类型

ALL SPEC DIMENSION REFER TO TYPE 1
 所有产品规格尺寸参照 TYPE 1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN Gino.Yao 20Aug2014	 TE Connectivity	
DIMENSIONS: mm		CHK Chris.Wang 20Aug2014		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD Xiang.Xu 20Aug2014	NAME HE-024-FC	
0 PLC ±-		PRODUCT SPEC 108-137044	SIZE A3	
1 PLC ±-		APPLICATION SPEC 114-137044	CAGE CODE 00779	
2 PLC ±-		WEIGHT -	DRAWING NO T2040244201000	
3 PLC ±-		CUSTOMER DRAWING	RESTRICTED TO -	
4 PLC ±-			SCALE 1:1	
ANGLES ±-		SHEET 2 OF 2		REV B1
FINISH -				
MATERIAL -				