
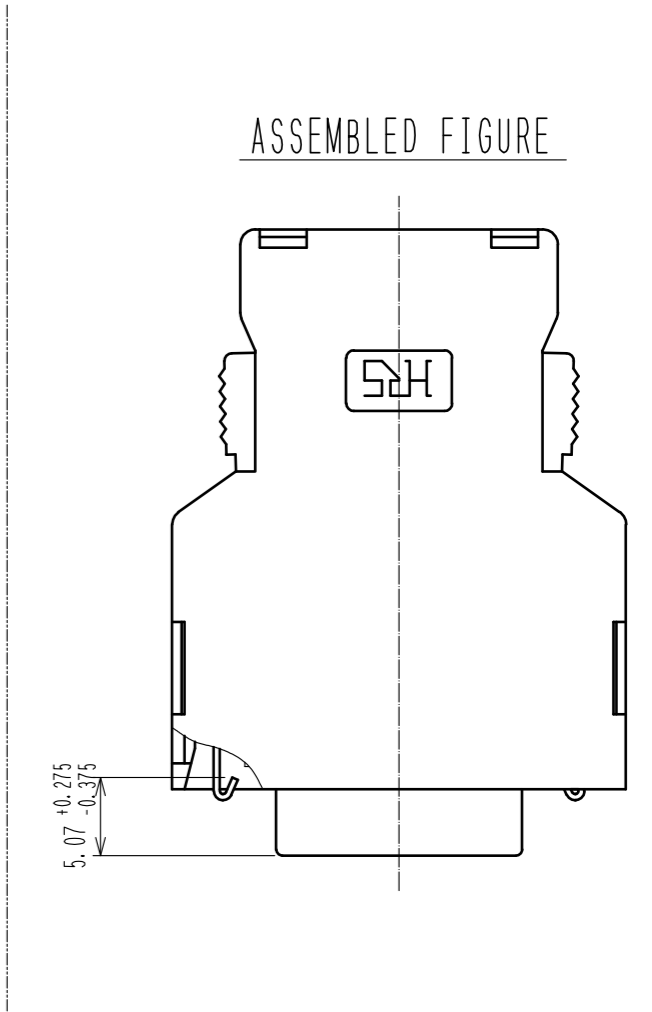


Jun.1.2023 Copyright 2023 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

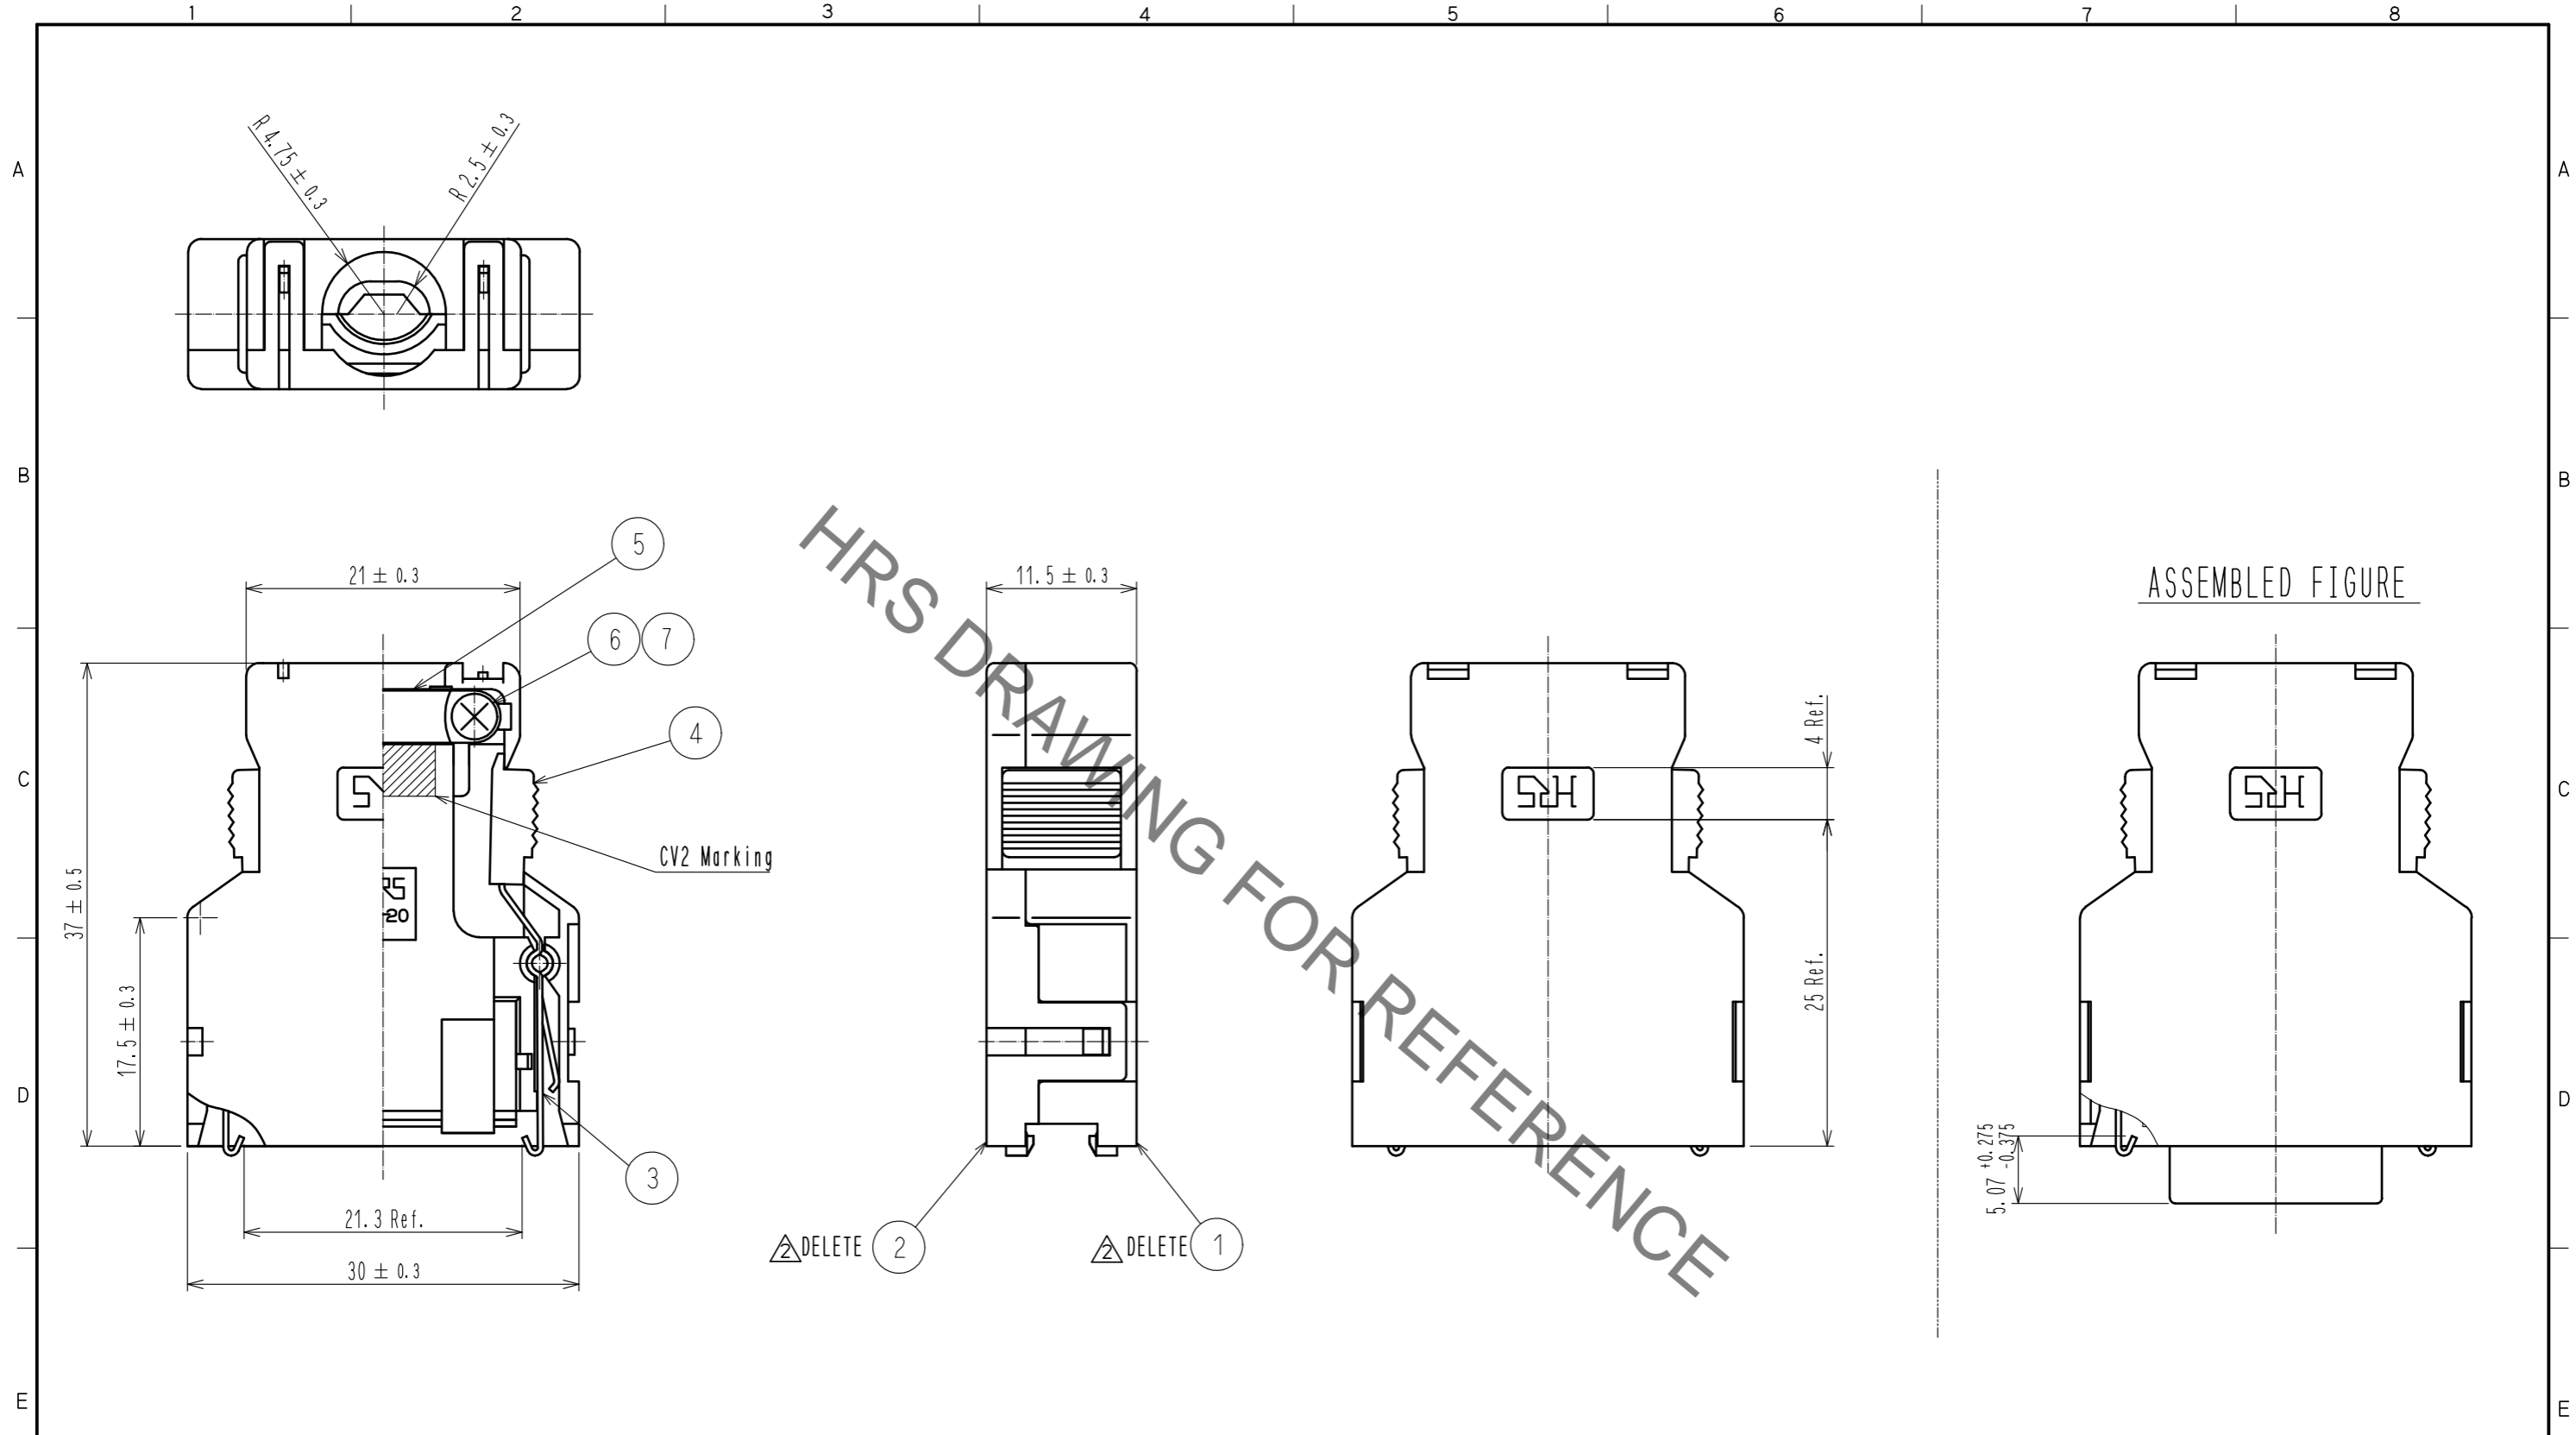

Note 1. Outer surface of cover case part no. ① and ② are matte finished equivalent to TH-117 (Tanazawa hakkosha Co., Ltd.). Except around the ditch of HRS mark.
 ② 2. Part no. ①, ③, ④, ⑦ are assembled together as a unit. Part no. ②, ⑤, ⑥ are not assembled when delivered.
 3. Outer diameter of applicable cable shall be $\phi 6 \pm 0.5$.

4	PC	Gray, UL94V-0			
3	Stainless steel		7	Brass	Nickel plating 0.8 μ m min.
2	PC	Gray, UL94V-0	6	Brass	Nickel plating 0.8 μ m min.
1	PC	Gray, UL94V-0	5	Stainless steel	
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
UNITS		SCALE	COUNT	DESCRIPTION OF REVISIONS	
mm		2 : 1	③	DIS-E-00009711	
HRS HIROSE ELECTRIC CO., LTD.		APPROVED : HO. MIWA	05.10.13	DESIGNED	KG. OKITA
		CHECKED : YH. ENAMI	05.10.07	CHECKED	MN. KENJO
		DESIGNED : TU. TANIGUCHI	05.10.03	DATE	20220502
		DRAWN : YK. SATO	05.09.21	DRAWING NO. EDC-044566-50-01	
				PART NO. FI-20-CV2(50)	
				CODE NO. CL0230-0504-2-50	
				② 1/1	