


Jun.1.2023 Copyright 2023 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

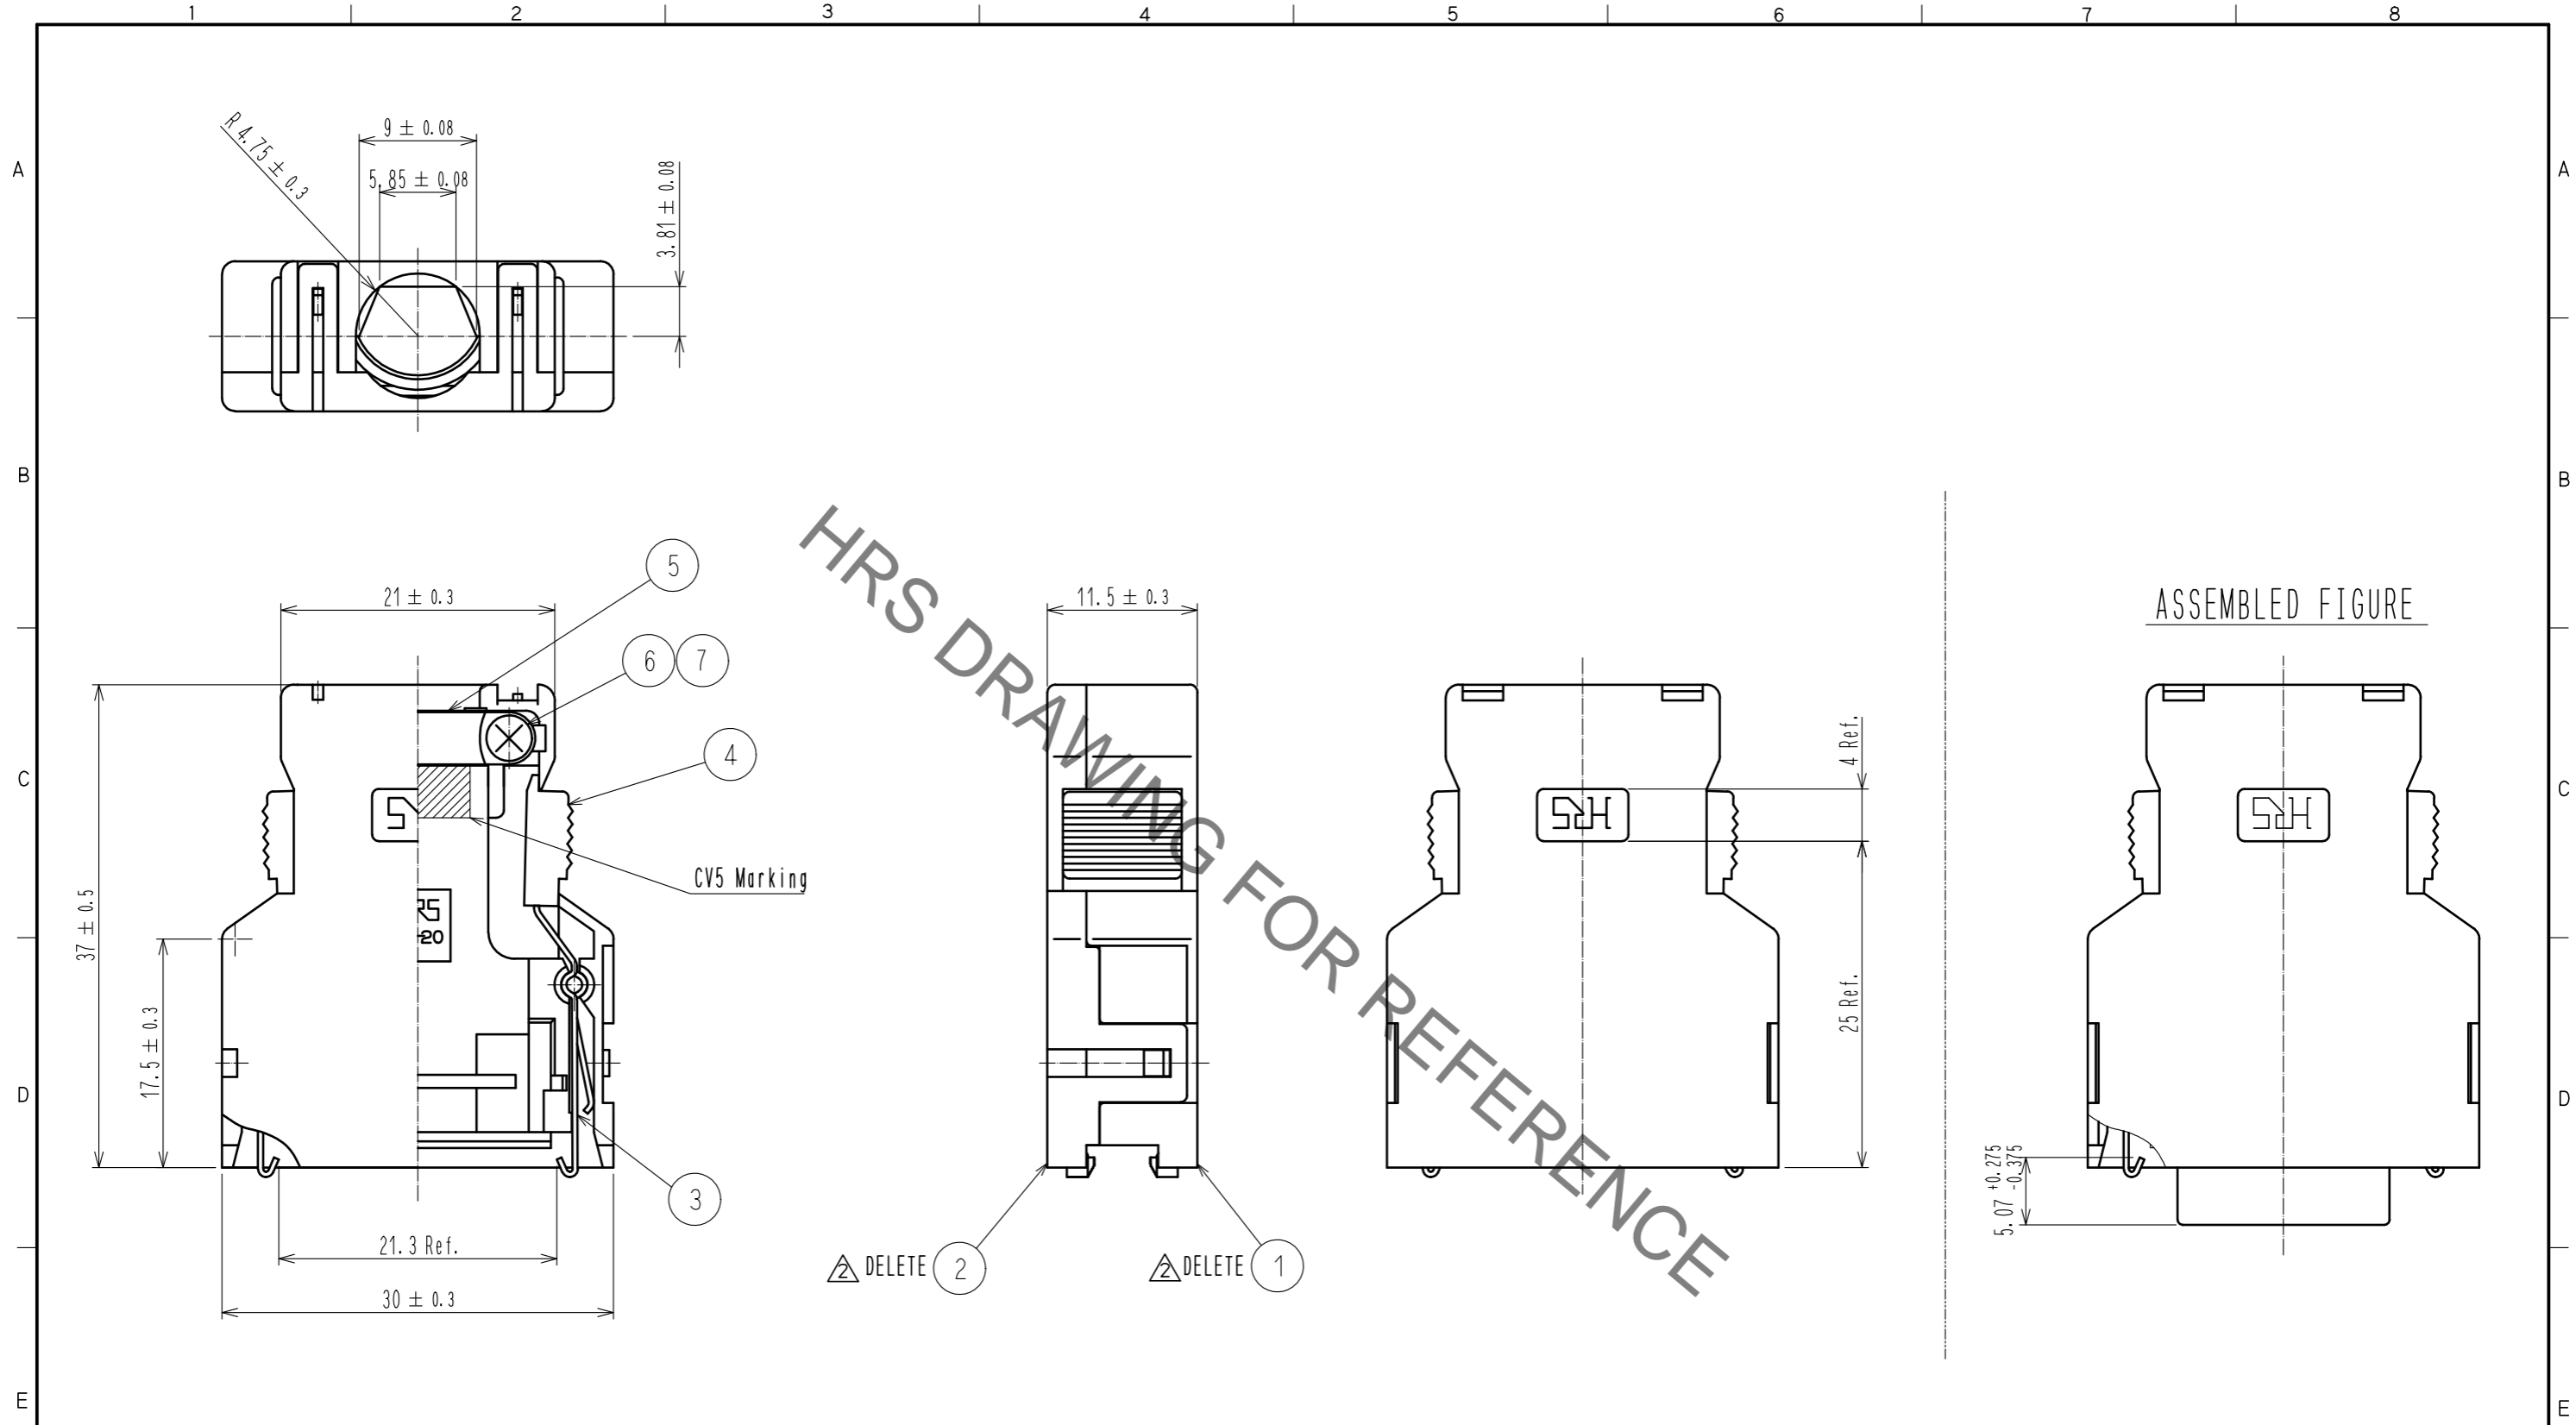

Note 1. Outer surface of cover case part no. ① and ② are matte finished equivalent to TH-117 (Tanazawa hakkosha Co.,Ltd.). Except around the ditch of HRS mark.  
 ① 2. Part no. ①, ③, ④, ⑦ are assembled together as a unit. Part no. ②, ⑤, ⑥ and the unit are not assembled when delivered.  
 3. Outer diameter of applicable cable shall be  $\phi 9.2 \pm 0.3$ .

NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
4	Polycarbonate	Gray . UL94V-0			
3	Stainless steel		7	Brass	Nickel plating $0.8 \mu\text{m}$ Min.
2	Polycarbonate	Gray . UL94V-0	6	Brass	Nickel plating $0.8 \mu\text{m}$ Min.
1	Polycarbonate	Gray . UL94V-0	5	Stainless steel	

UNITS	SCALE	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
mm	2 : 1	3	DIS-E-00009711	KG. OKITA	MN. KENJO	20220502

APPROVED : HO. MIWA	20051017	DRAWING NO.	EDC-120074-50-01
CHECKED : YH. ENAMI	20051014	PART NO.	FI-20-CV5(50)
DESIGNED : TU. TANIGUCHI	20051014	CODE NO.	CL0230-0515-9-50
DRAWN : YK. SATO	20050907		