


Jun.1.2023 Copyright 2023 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

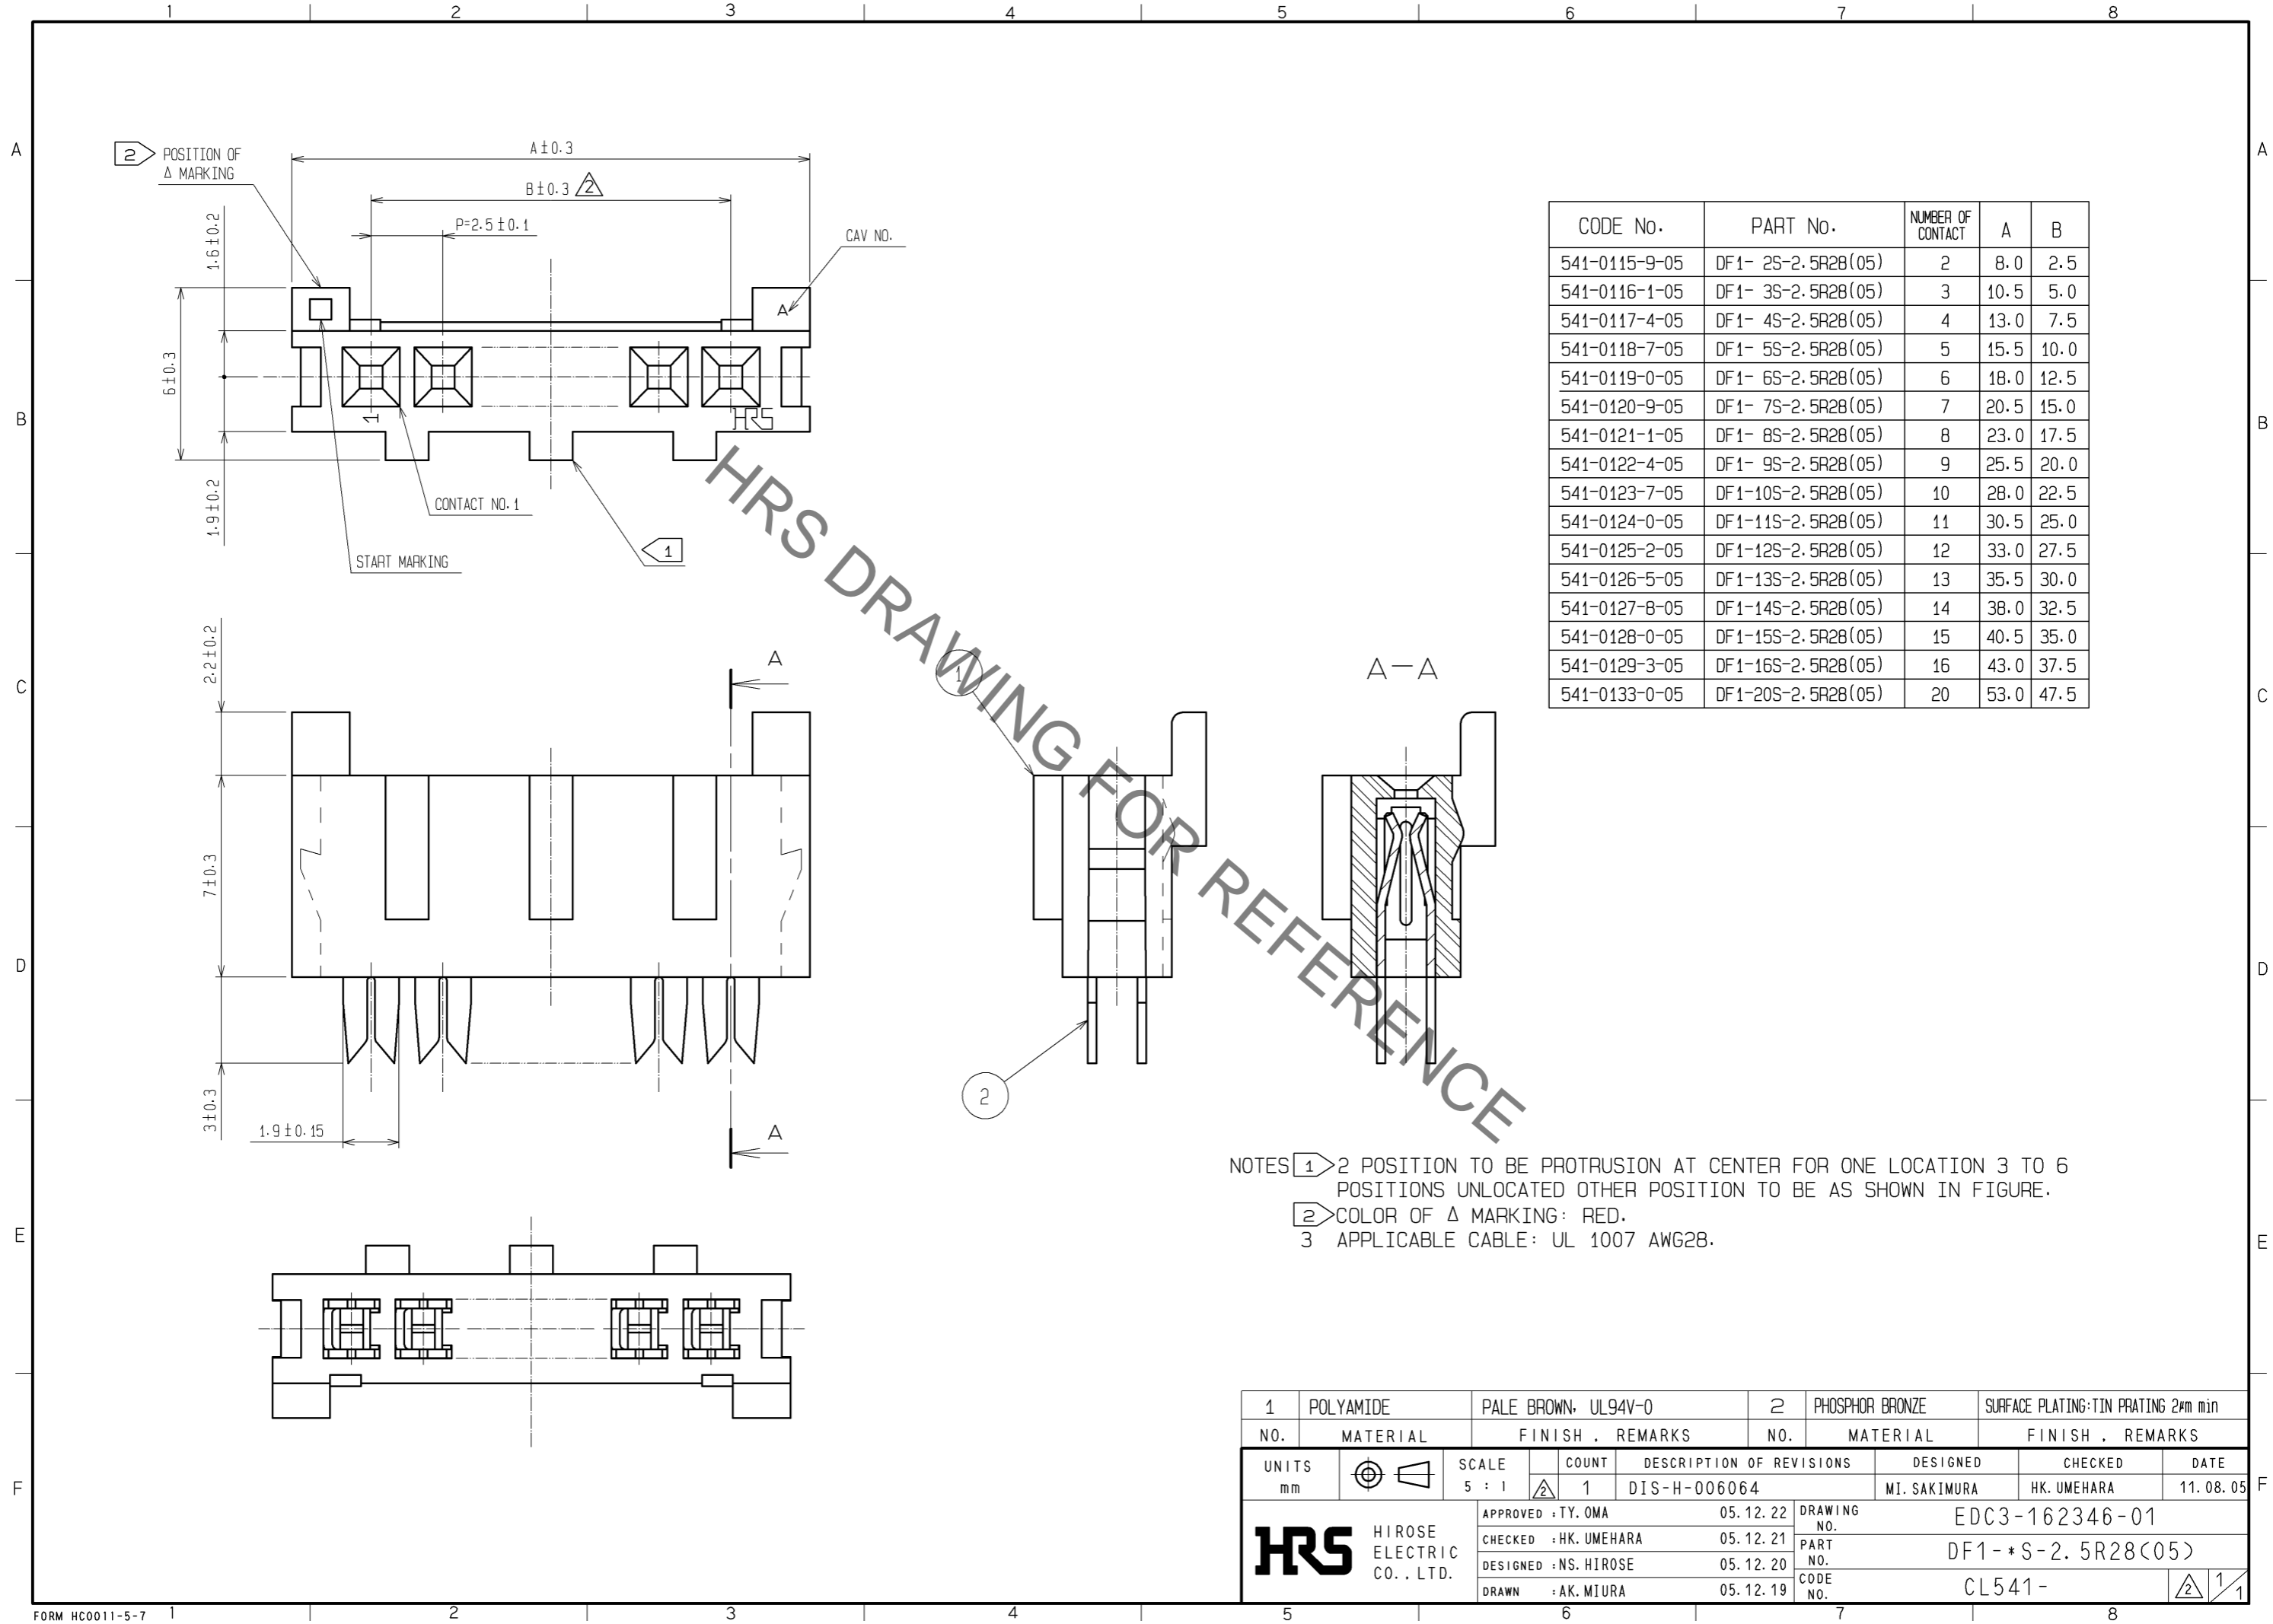

CODE No.	PART No.	NUMBER OF CONTACT	A	B
541-0115-9-05	DF1- 2S-2.5R28(05)	2	8.0	2.5
541-0116-1-05	DF1- 3S-2.5R28(05)	3	10.5	5.0
541-0117-4-05	DF1- 4S-2.5R28(05)	4	13.0	7.5
541-0118-7-05	DF1- 5S-2.5R28(05)	5	15.5	10.0
541-0119-0-05	DF1- 6S-2.5R28(05)	6	18.0	12.5
541-0120-9-05	DF1- 7S-2.5R28(05)	7	20.5	15.0
541-0121-1-05	DF1- 8S-2.5R28(05)	8	23.0	17.5
541-0122-4-05	DF1- 9S-2.5R28(05)	9	25.5	20.0
541-0123-7-05	DF1-10S-2.5R28(05)	10	28.0	22.5
541-0124-0-05	DF1-11S-2.5R28(05)	11	30.5	25.0
541-0125-2-05	DF1-12S-2.5R28(05)	12	33.0	27.5
541-0126-5-05	DF1-13S-2.5R28(05)	13	35.5	30.0
541-0127-8-05	DF1-14S-2.5R28(05)	14	38.0	32.5
541-0128-0-05	DF1-15S-2.5R28(05)	15	40.5	35.0
541-0129-3-05	DF1-16S-2.5R28(05)	16	43.0	37.5
541-0133-0-05	DF1-20S-2.5R28(05)	20	53.0	47.5

NOTES ① 2 POSITION TO BE PROTRUSION AT CENTER FOR ONE LOCATION 3 TO 6 POSITIONS UNLOCATED OTHER POSITION TO BE AS SHOWN IN FIGURE.  
② COLOR OF Δ MARKING: RED.  
③ APPLICABLE CABLE: UL 1007 AWG28.

1	POLYAMIDE	PALE BROWN, UL94V-0	2	PHOSPHOR BRONZE	SURFACE PLATING:TIN PRATING 2μm min
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
UNITS mm		SCALE 5 : 1	COUNT 1	DESCRIPTION OF REVISIONS DIS-H-006064	DESIGNED MI. SAKIMURA
		APPROVED : TY. OMA	05.12.22	DESIGNED	CHKD
		CHECKED : HK. UMEHARA	05.12.21	CHKD	DATE
		DESIGNED : NS. HIROSE	05.12.20	DATE	
		DRAWN : AK. MIURA	05.12.19		
<b>HRS</b> HIROSE ELECTRIC CO., LTD.		DRAWING NO. EDC3-162346-01		PART NO. DF1-*S-2.5R28(05)	
		CODE NO. CL541-			