


May.1.2023 Copyright 2023 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

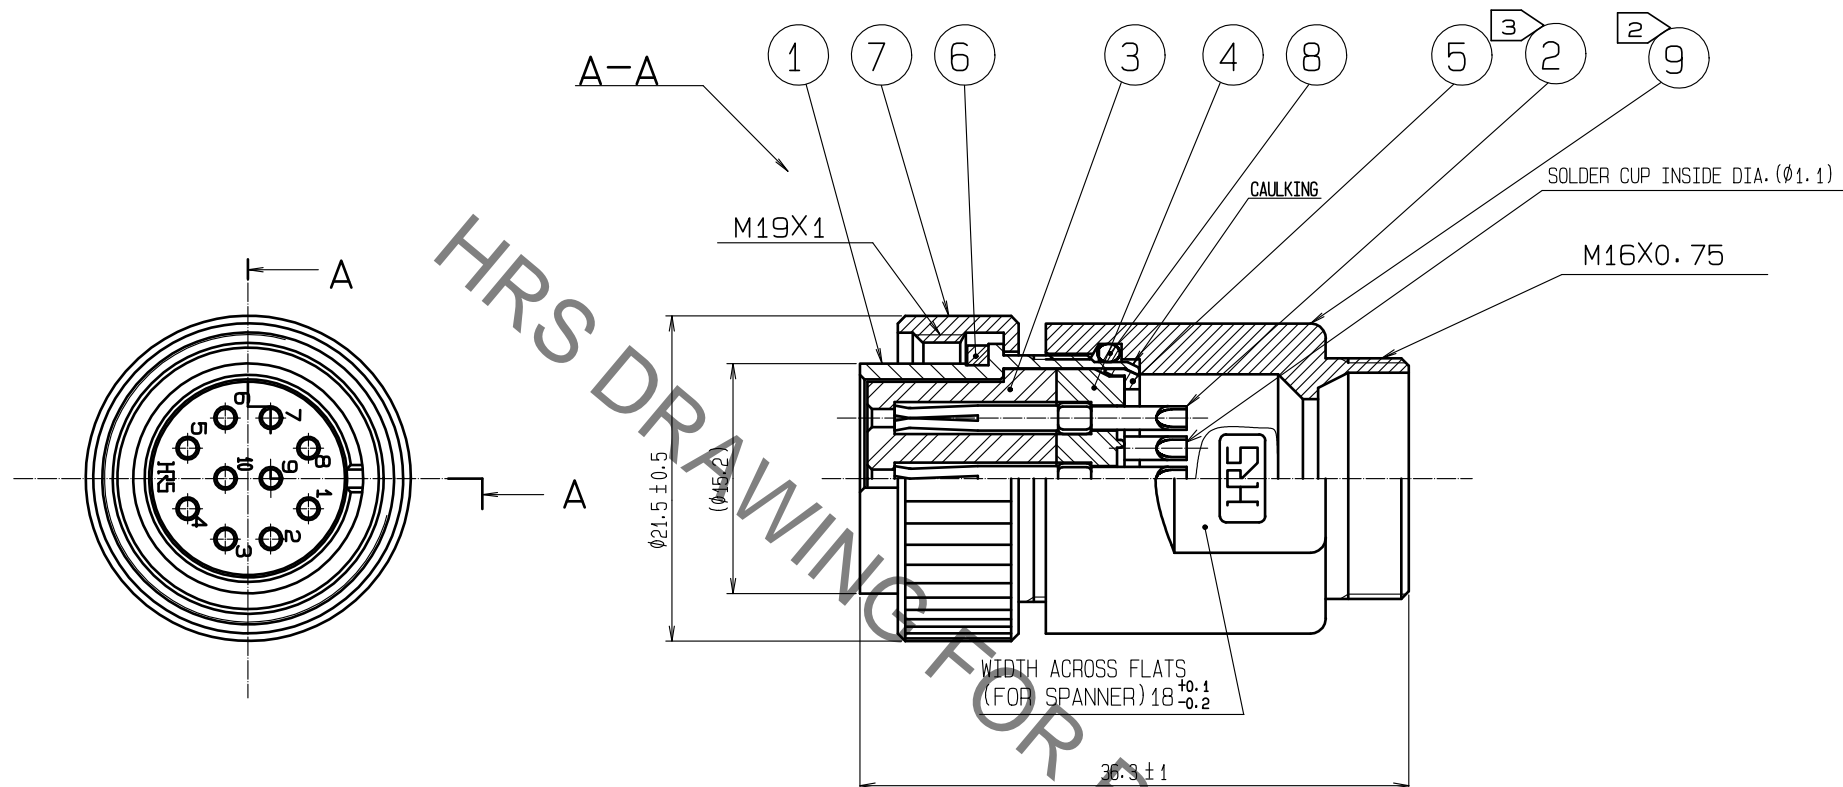

- NOTES
- ① ONE EXAMPLE OF THE ROTATION OF REF. NO. ⑩ TO REF. NO. ① IS SHOWN.
 - ② THE RECOMMENDED CLAMP TORQUE, REF. NO. ⑩: 3N·m.
LOCTITE 243, HENKEL JAPAN OR EQUIVALENT IS RECOMMENDED TO PREVENT REF. NO. ⑩ FOR LOOSENING.
 - ③ THE DIRECTION OF SOLDER CUP, REF. NO. ⑩ IS AN EXAMPLE.
 - ④ THIS PRODUCTS TO BE USED WITH CABLE CLAMP, JR13WCC-*(72).
* DESIGNATE DIAMETER(mm) OF APPLICABLE CABLE.

NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
5	POLYACETAL	(WHITE)			
4	DIALLYL PHTHALATE	(BLACK) UL94V-0	9	ZINC ALLOY	CHROME PLATING ⚠
3	DIALLYL PHTHALATE	(BLACK) UL94V-0	8	SILICONE RUBBER	(BLACK)
2	COPPER ALLOY ⚠	SILVER PLATING 5μm min.	7	BRASS	CHROME PLATING ⚠
1	ZINC ALLOY	CHROME PLATING ⚠	6	SILICONE RUBBER	(RED)

UNITS mm		SCALE 2 : 1	COUNT 4	DESCRIPTION OF REVISIONS DIS-C-00007431	DESIGNED TY. SUZUKI	CHECKED HY. KOBAYASHI	DATE 20210803
HRS HIROSE ELECTRIC CO., LTD.		APPROVED : TP. KOMATSU 20210524	DRAWING NO. EDC-111066-76-00				
		CHECED : HY. KOBAYASHI 20210524	PART NO. RM15WTPZ-10S(76)				
		DESIGNED : TY. SUZUKI 20210524	CODE NO. CL0109-1614-3-76				
		DRAWN : KR. SUZUKI 20210519					