



DH-ROBOTICS VOICE COIL ACTUATOR

DH-Robotics Technology Co.,Ltd.

Linked in | VouTube Search DH-Robotics

EN-3.2.2023.05 en.dh-robotics.com info@dh-robotics.com

A507, Industrialization building, Yuexing 3rd Road, Nanshan district, Shenzhen, China, 518063






CONTENTS


PRODUCT FEATURES

Compact design, thin and light. The thinnest product thickness is only **16 mm**



Soft landing

Contact the surface of an object with high speed and low force





1	Introduction to Voice Coil Actuators	02
2	VLA Series Voice Coil Linear Actuator	07

	VLAR Series	
5	Voice Coil Linear Rotary Actuator	17



29



3 working modes

- Velocity mode
- Torque mode
- Position mode

Application scenarios



Hi-speed pick and place



Precision machining



Automated production line



Force repeatability: ±3 g
Stroke resolution: up to 0.5 μm
Positioning repeatability: ±2 μm
Rotary position resolution:0.005°

PRODUCT **ADVANTAGES**

 $\pm 3 g$ **Force control** accuracy

The force generated by the voice coil actuator is proportional to the current. The voice coil actuator is combined with a high-performance guide rail. The coil and stator parts of the motor are non-contact and wear-free, and the force control accuracy of up to ± 3 g can be achieved.

0.5 μm Stroke resolution

 $\pm 2 \mu m$ Positioning repeatability

16 mm Optimal thickness

Soft landing High-precision magnetic encoder with micron-level resolution. Optical encoder with 0.5µm resolution, Magnetic grid encoder with 1um resolution.

The DH-Robotics voice coil actuator is a direct drive motor combined with a micron-level magnetic encoder. When it positions to the same point repeatedly, the accuracy deviation of the stop position is $\pm 2 \,\mu m$.

The DH-Robotics voice coil actuator is designed to be highly integrated, with a minimum thickness of 16 mm for the series of products, greatly saving the internal space of the module device and facilitating the arrangement of the multi-motor matrix combination.

The intelligent soft landing function enables the target object to be softly touched with precise force control. This technology reduces the scratch rate and fragmentation rate of precision fragile or high unit price parts. In this way, the yield rate and productivity are improved.

Advantages Over Conventional Solution

Take chip packaging as an example:

Pain points

The conventional chip pickup mechanism contacts the chip too fast, and the contact force is too large, which will cause the chip to be damaged due to excessive pressing. And it cannot achieve high force control, limiting the efficiency of the chip mounting process.

	Conventional solution	
Device used	Combined mounting head	
Motion module	The module is integrated with: Linear motor Servo motor/stepper motor Voice coil motor (VCM)	
Repeatability	Positioning repeatability: $\pm 10 \mu$ m Rotation repeatability: $\pm 0.5 ^{\circ}$ Force control accuracy: $\pm 10 g$	

The advantages of DH-Robotics voice coil actuator compared with the common combined mounting head are:





DH-Robotics solution

VLAR-20-15 voice coil linear rotary actuator

All-in-one integrated module design

Positioning repeatability: ±2 µm **†** Improved by more than 5 times

Rotation repeatability: ±0.05 ° **†** Improved by more than 10 times


Force control accuracy: ± 3 g **†** Improved by more than 3 times





en.dh-robotics.com 3/4

APPLICATIONS




Flexible pick and place of vulnerable components

The voice coil actuator can provide accurate linear and rotary motions of the Z-axis while performing high-speed pick-and-place motions. With the soft landing function, it can touch precision components with a force of ± 3 g to protect the components from damage, for example, in chip packaging and camera module assembly.



Electronics testing

Highly integrated design, the minimum thickness can reach 16mm, suitable for multi-motor matrix combination arrangement, and can complete a variety of touch operation modes. The force control accuracy is $\pm 3g$, the repeat accuracy (position) is $\pm 2\mu$ m, the product runs stably, so that the detection efficiency is improved. It can be applied to touch panel testing, keyboard testing, switch testing.




New energy battery thickness measurement

The thrust and speed of the actuator are set through the program, and the battery pack is pushed flexibly. When the set force is reached, the position is measured and the thickness information of the battery pack is output. The characteristics of high stability, high frequency and long life of the voice coil actuator can ensure long-term, efficient, accurate and stable execution of detection.

VOICE COIL ACTUATOR





High-precision parts assembly

Miniature electronic components have high requirements for production and assembly, such as camera module assembly. The precise force control and soft landing capability of the voice coil linear rotary actuator can prevent parts from being damaged; high position repeatability ensures the accuracy of positioning and assembly and improves the overall assembly production yield.



VLA SERIES Voice Coil Linear Actuator

VLA-16-15(Magnetic encoder) VLA-16-15(With vacuum) VLA-25-25(Magnetic encoder) VLA-30-25(Optical/Magnetic encoder)

PRODUCT FEATURES

High force repeatability Soft landing

Adjustable parameters

The thrust repeatability of VLA series of products is within ± 3 g, meeting the production and assembly requirements of semiconductors, optoelectronics, and other industries for high force control accuracy.


light and thin, and has strong parameters and set different modes through the control software.

INSTALLATION METHOD

Install it using the screw holes on the back of the product.

Installation directions:

- Horizontal direction
- Vertical installation with the vertical rod pointing down
- Vertical installation with the vertical rod pointing up



APPLICATION SCENARIOS


The force repeatability of ± 3 g, micron-level resolution, and ultra-high motion frequency of the VLA series help to improve the efficiency and yield rate of quick pick-and-place, assembly, testing, and other scenarios in semiconductor, 3C electronics, optoelectronics, and other industries.


Light, thin, and easy to use


The product design is compact, maneuverability. You can adjust the speed, thrust, and position

High-speed and highfrequency Long life over 100 million cycles

With high response-ability, high speed, and high frequency, the frequency can reach more than 30 Hz without load. The service life is up to 100 million cycles, and it is stable and durable.






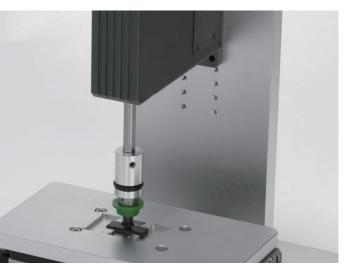


en.dh-robotics.com 7/8

VLA-16-15 (Magnetic encoder) VOICE COIL LINEAR ACTUATOR

SELECTION METHOD

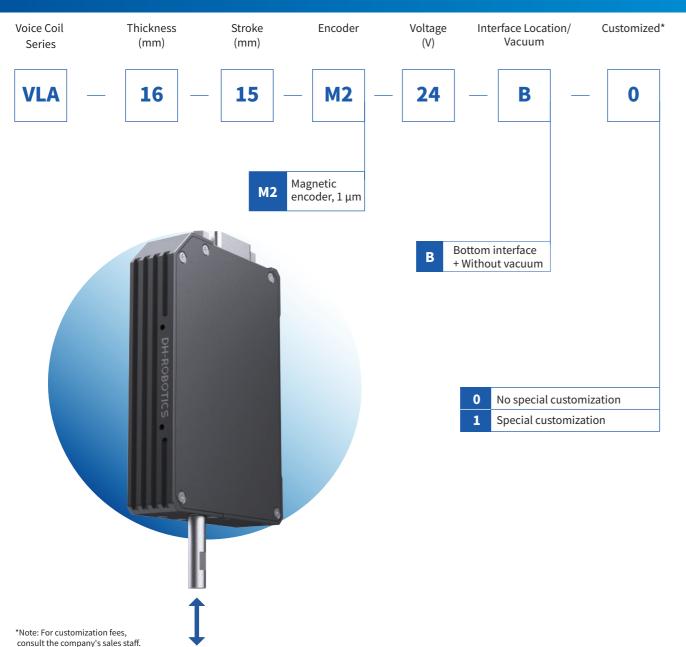


TECHNICAL SPECIFICATIONS







For specific selection of voice coil products, please contact DH-Robotics or authorized agent for application and process confirmation. When higher requirements for actuators are required, please contact engineering staff.


Dimensions





Performance specifications			
Peak thrust	6 N		
Continuous thrust	3 N		
Total stroke	15 mm		
Force repeatability	±3 g		
Force constant	3 N/A		
Linear stroke resolution	1 μm		
Positioning repeatability	±5 μm		
No-load frequency	More than 30 Hz		
Mechanical spec	ifications		
Overall mass	190 g		
Movable part mass	30 g		
Size	80 mm x 55 mm x 16 mm		
Vacuum	Without vacuum		
Operating environment			
Operating voltage	$24VDC\pm10\%$		
Continuous current	1.0 A		
Peak current	2.4 A		
Recommended load	≪80 g		
IP rating	IP 40		
Recommended operating environment	0°C-40°C, 85% RH or less		
International standard compliance	CE, FCC, RoHS		







en.dh-robotics.com

VLA-16-15 (With vacuum) **VOICE COIL LINEAR ACTUATOR**

SELECTION METHOD

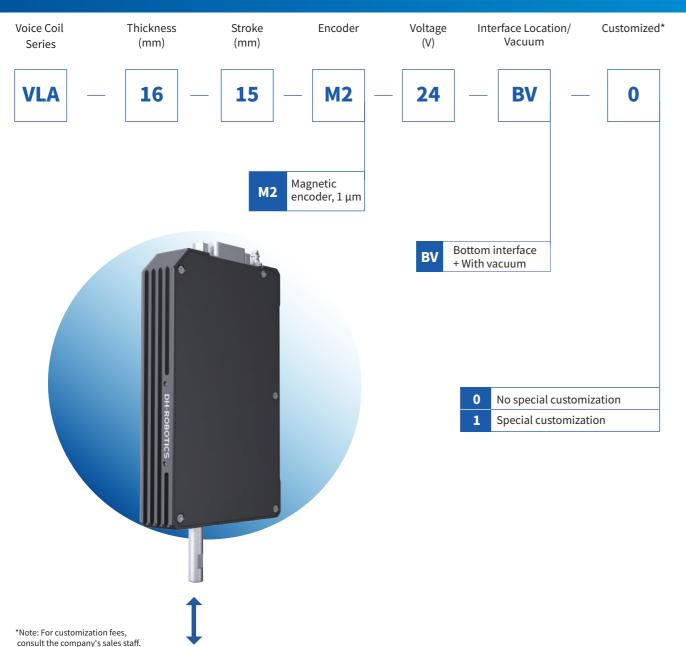


TECHNICAL SPECIFICATIONS






For specific selection of voice coil products, please contact DH-Robotics or authorized agent for application and process confirmation. When higher requirer engineering staff. nents for actuators are required, please contact

Dimensions











Performance specifications			
Peak thrust	6 N		
Continuous thrust	3 N		
Total stroke	15 mm		
Force repeatability	±3 g		
Force constant	3 N/A		
Linear stroke resolution	1 μm		
Positioning repeatability	±5 μm		
No-load frequency	More than 30 Hz		
Mechanical spec	ifications		
Overall mass	220 g		
Movable part mass	30 g		
Size	100 mm x 62 mm x 16 mm		
Vacuum	With vacuum		
Operating environment			
Operating voltage	24 V DC \pm 10%		
Continuous current	1.0 A		
Peak current	2.4 A		
Recommended load	≪80 g		
IP rating	IP 40		
Recommended operating environment	0°C-40°C, 85% RH or less		
International standard compliance	CE, FCC, RoHS		



en.dh-robotics.com 11/12

VLA-25-25 (Magnetic encoder) **VOICE COIL LINEAR ACTUATOR**


TECHNICAL SPECIFICATIONS




____ ξQ} \mathcal{R} Intelligent Adjustable Long life feedback parameters


For specific selection of voice coil products, please contact DH-Robotics or authorized agent for application and process confirmation. When higher requirer nents for actuators are required, please contact engineering staff.

Dimensions

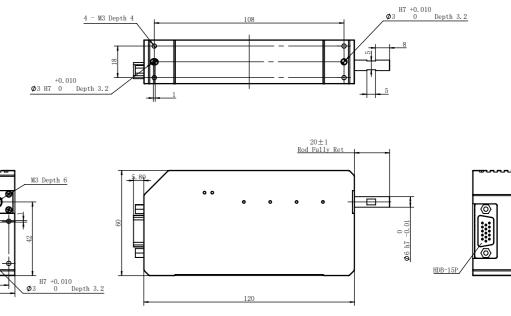

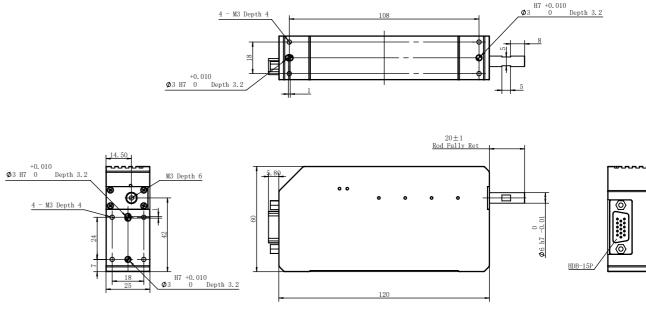

SELECTION METHOD

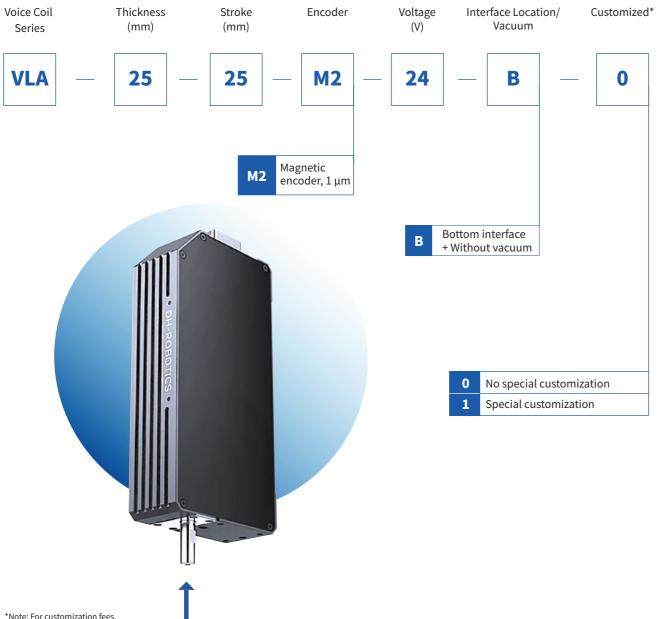


consult the company's sales staff.

Performance specifications			
Peak thrust	11 N		
Continuous thrust	6 N		
Total stroke	25 mm		
Force repeatability	±3 g		
Force constant	5 N/A		
Linear stroke resolution	1 μm		
Positioning repeatability	±5 μm		
No-load frequency	More than 30 Hz		
Mechanical spec	ifications		
Overall mass	510 g		
Movable part mass	54 g		
Size	120 mm x 60 mm x 25 mm		
Vacuum	Without vacuum		
Operating environment			
Operating voltage	$24\mathrm{VDC}\pm10\%$		
Continuous current	1.2 A		
Peak current	2.2 A		
Recommended load	≤150 g		
IP rating	IP 40		
Recommended operating environment	0°C-40°C, 85% RH or less		
International standard compliance	CE, FCC, RoHS		


en.dh-robotics.com 13/14

VLA-30-25 (Optical/Magnetic encoder) **VOICE COIL LINEAR ACTUATOR**

SELECTION METHOD

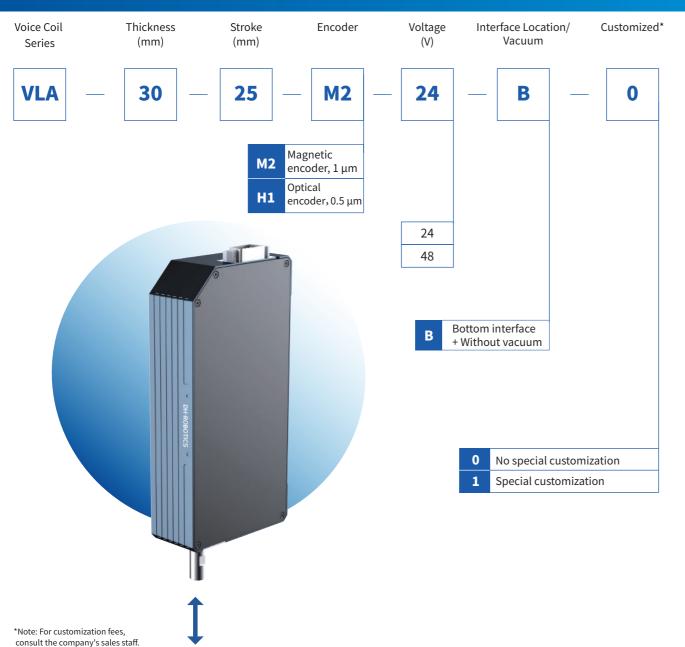


TECHNICAL SPECIFICATIONS







For specific selection of voice coil products, please contact DH-Robotics or authorized agent for application and process confirmation. When higher requirements for actuators are required, please contact engineering staff.


Dimensions





Performance specifications				
Peak thrust	24 N	30 N		
Continuous thrust	12 N	16 N		
Total stroke	25 r	nm		
Force repeatability	±:	3 g		
Force constant	8.0	N/A		
Linear stroke resolution	•	$\frac{1\mu m}{({\rm Magnetic grid encoder})}$		
Positioning repeatability	ب ±5	μm		
No-load frequency	More that	More than 30 Hz		
Mechanical specifications				
Overall mass	860 g			
Movable part mass	13	130 g		
Size	140 mm x 75	140 mm x 75 mm x 30 mm		
Vacuum	Without	Without vacuum		
Operating environment				
Operating voltage 24	4 V DC \pm 10%	48 V DC \pm 10%		
Continuous current	1.5 A	2 A		
Peak current	3 A	4 A		
Recommended load	≪300 g			
IP rating	IP	IP 40		
Recommended operating 0°C-40°C, 85% RH or less				
International standard CE, FCC, RoHS compliance				





en.dh-robotics.com 15/16

VLAR SERIES Voice Coil Linear Rotary Actuator

VLAR-20-15(Magnetic encoder) VLAR-20-15(Optical encoder) VLAR-20-25(Optical/Magnetic encoder) VLAR-25-25(Magnetic encoder) VLAR-25-40(Optical/Magnetic encoder)



PRODUCT FEATURES

High performance Linear/Rotary motion Adjustable parameters

Provide accurate linear and rotary actions of the Z-axis during high-speed motion, with adjustable velocity, thrust, and position parameters, enabling complex actions requiring high frequency and high precision.

Hollow rod Soft landing


The product is compact, light, and thin. It employs a hollow rod design to support pick-and-place tasks. The intelligent soft landing function protects the picked and placed workpiece with precise force control. The Z-axis has a built-in spring to prevent the axis from falling off due to power-off during vertical operations.

INSTALLATION METHOD

Install it using the screw holes on the back of the product.

Installation directions:

- Horizontal direction
- Vertical installation with the vertical rod pointing down
- Vertical installation with the vertical rod pointing up



APPLICATION SCENARIOS

The force repeatability of ± 3 g and the micron-level resolution can be applied to the fast pick-and-place, assembly, testing, and other scenarios in semiconductors, 3C electronics, and other industries.


The unique linear and rotary motions of the Z-axis of the VLAR series can adapt to more abundant industrial scenarios, such as positioning, correction, and assembly in medical automation, 3C, and packaging automation.


Power-off protection


Precision resolution Long life over 100 million cycles


Regarding this product, the stroke resolution is up to $0.5 \,\mu m$, the rotary position resolution is 0.005°, and the thrust repeatability is within ± 3 g. With high-quality guide rail-level related components, it has a service life of up to 100 million cycles, and it is stable and durable.









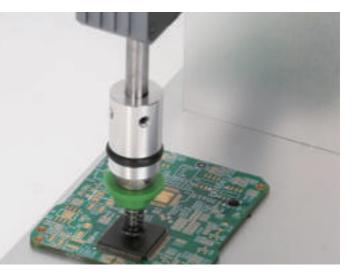

en.dh-robotics.com 17/18


VLAR-20-15 (Magnetic encoder)

VOICE COIL LINEAR ROTARY ACTUATOR

SELECTION METHOD

consult the company's sales staff.






TECHNICAL


SPECIFICATIONS




For specific selection of voice coil products, please contact DH-Robotics or authorized agent for application and process confirmation. When higher requirements for actuators are required, please contact engineering staff.


Dimensions

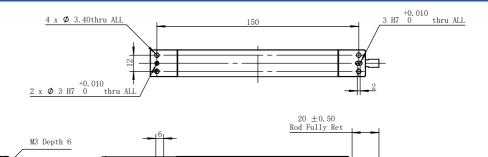

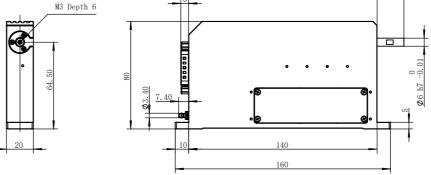

ions			
16.5 N			
8 N			
15 mm			
±3 g			
6.7 N/A			
0.04 N · m			
2000 rpm			
1 μm			
±5 μm			
0.02°			
Mechanical specifications			
555 g			
144 g			
140 mm x 80 mm x 20 mm			
With vacuum			
:			
24 V DC \pm 10%			
(Linear) 1.2 A (Rotary)0.6 A			
(Linear) 2.5 A (Rotary)2.5 A			
≤150 g			
20 g · cm ²			
IP 40			
0°C-40°C, 85% RH or less			
CE, FCC, RoHS			








VLAR-20-15 (Optical encoder)

VOICE COIL LINEAR ROTARY ACTUATOR

TECHNICAL SPECIFICATIONS



SELECTION METHOD


*Note: For customization fees, consult the company's sales staff.




{ပ္သဲ ᡣᡐ Intelligent Adjustable Long life feedback parameters

For specific selection of voice coil products, please contact DH-Robotics or authorized agent for application and process confirmation. When higher requirements for actuators are required, please contact engineering staff.

Dimensions

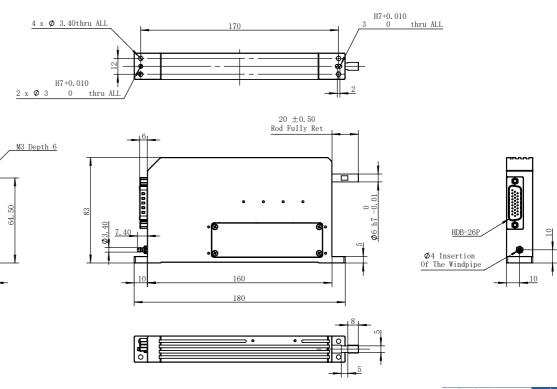

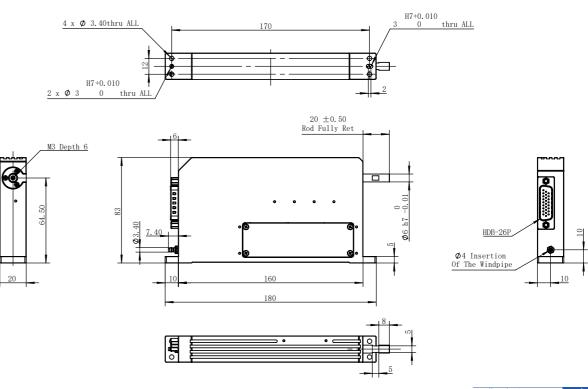


Performance specifica	tions		
Peak thrust	16.5 N		
Continuous thrust	8 N		
Total stroke	15 mm		
Force repeatability	±3 g		
Force constant	6.7 N/A		
Maximum torque	0.04 N · m		
Maximum speed	2000 rpm		
Linear stroke resolution	0.5 μm		
Positioning repeatability	±2 μm		
Rotary encoder resolution	0.005°		
Mechanical specifications			
Overall mass	600 g		
Movable part mass	156 g		
Size	160 mm x 83 mm x 20 mm		
Vacuum	With vacuum		
Operating environment	nt		
Operating voltage	$24\mathrm{VDC}\pm10\%$		
Continuous current	(Linear) 1.2 A (Rotary)0.6 A		
Peak current	(Linear) 2.5 A (Rotary)2.5 A		
Recommended load	≤150 g		
Recommended load inertia	20 g · cm ²		
IP rating	IP 40		
Recommended operating environmen	0°C-40°C, 85% RH or less		
International standard compliance	CE, FCC, RoHS		

en.dh-robotics.com 21/22


VLAR-20-25 (Optical/Magnetic encoder)

VOICE COIL LINEAR ROTARY ACTUATOR

SELECTION METHOD

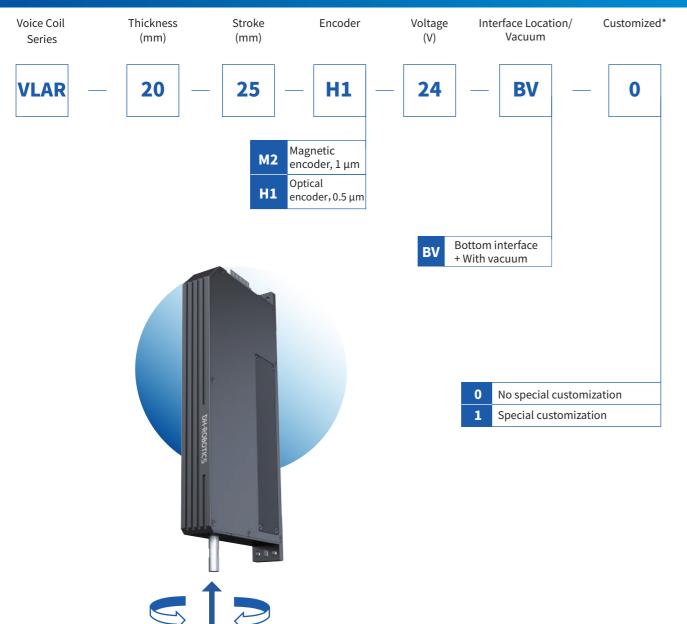


TECHNICAL SPECIFICATIONS






For specific selection of voice coil products, please contact DH-Robotics or when higher requirements for actuators are required, please contact engineering staff.

Dimensions

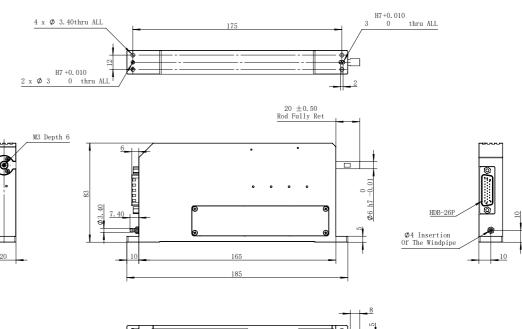

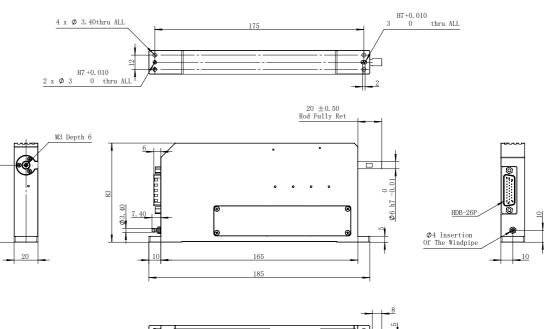



*Note: For customization fees, consult the company's sales staff.


Performance specifications			
Peak thrust	16 N		
Continuous thrust	8 N		
Total stroke	25	mm	
Force repeatability	±	3 g	
Force constant	6.5	N/A	
Maximum torque	0.05	6 N∙m	
Maximum speed	2000) rpm	
Linear stroke resolution	$1\mu m^{(Magnetic grid}_{encoder)}$	$0.5\mu m {\rm (Optical encoder)}$	
Positioning repeatability	$\pm 5\mu m^{\text{(Magnetic grid}}_{\text{encoder})}$	$\pm 2\mu m$ (Optical encoder)	
Rotary encoder resolution	0.02° (Magnetic grid encoder)	0.005° (Optical encoder)	
Mechanical specifications			
Overall mass	687 g		
Movable part mass	166 g		
Size	165 mm x 83 mm x 20 mm		
Vacuum	With vacuum		
Operating environm	nent		
Operating voltage	24 V DC \pm 10%		
Continuous current	(Linear) 1.2 A (Rotary)0.6 A		
Peak current	(Linear) 2.5 A (Rotary)2.5 A		
Recommended load	≤150 g		
Recommended load inertia	20 g · cm ²		
IP rating	IP 40		
Recommended operating environmen	0°C-40°C,85	0°C-40°C, 85% RH or less	
International standard compliance	CE, FC	C, RoHS	

en.dh-robotics.com

VLAR-25-25_(Magnetic encoder)

VOICE COIL LINEAR ROTARY ACTUATOR

TECHNICAL SPECIFICATIONS




SELECTION METHOD




{ပ္သ 2° Intelligent Adjustable Long life feedback parameters

For specific selection of voice coil products, please contact DH-Robotics or when higher requirements for actuators are required, please contact engineering staff.

Dimensions

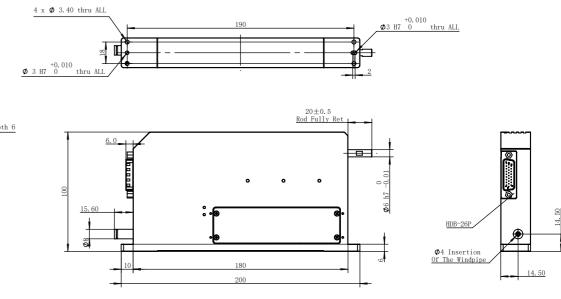

M3 Depth 6 ¢




Performance specifica	ations		
Peak thrust	15 N		
Continuous thrust	8 N		
Total stroke	25 mm		
Force repeatability	±5 g		
Force constant	6.67 N/A		
Maximum torque	0.072 N·m		
Maximum speed	2000 rpm		
Linear stroke resolution	1 μm		
Positioning repeatability	±5 μm		
Rotary encoder resolution	0.02°		
Mechanical specifications			
Overall mass	1020 g		
Movable part mass	280 g		
Size	180 mm x 100 mm x 25 mm		
Vacuum	With vacuum		
Operating environme	nt		
Operating voltage	24 V DC \pm 10%		
Continuous current	(Linear)1.2 A (Rotary)1.0 A		
Peak current	(Linear)2.2 A (Rotary)2.5 A		
Recommended load	≤200 g		
Recommended load inertia	140 g · cm ²		
IP rating	IP 40		
Recommended operating environmen	0°C-40°C, 85% RH or less		
International standard compliance	CE, FCC, RoHS		

en.dh-robotics.com


VLAR-25-40 (Optical/Magnetic encoder) **VOICE COIL LINEAR ROTARY ACTUATOR**

SELECTION METHOD

consult the company's sales staff.

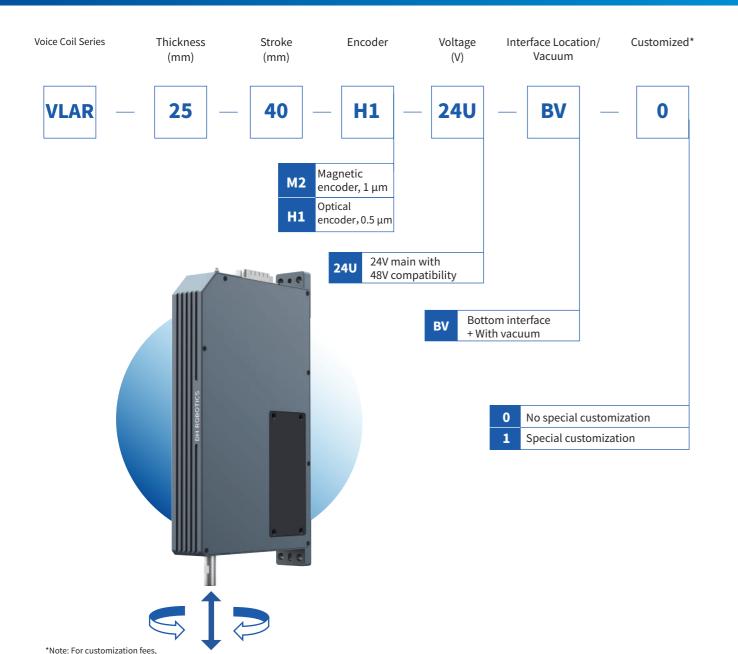


TECHNICAL SPECIFICATIONS

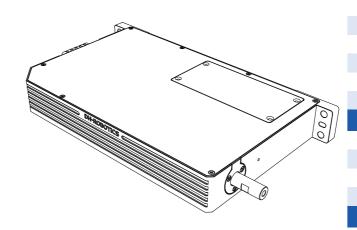





For specific selection of voice coil products, please contact DH-Robotics or authorized agent for application and process confirmation. When higher requirements for actuators are required, please contact engineering staff.

Dimensions



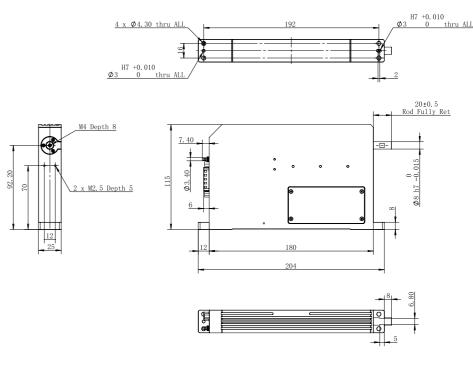

Performance specifications			
Peak thrust			
Continuous thrust	5.	5.5 N	
Total stroke	40	mm	
Force repeatability	±	3 g	
Force constant	4.6	N/A	
Maximum torque	0.035	ōN∙m	
Maximum speed	2000) rpm	
Linear stroke resolution	$1\mu m^{(\text{Magnetic grid}}_{\text{encoder})}$	$0.5\mu m {\rm (Optical encoder)}$	
Positioning repeatability	$\pm 5\mu m^{(Magnetic grid}_{encoder)}$	$\pm 2\mu m$ $_{\text{encoder})}^{(Optical}$	
Rotary encoder resolution	0.02° (Magnetic grid encoder)	0.005° (Optical encoder)	
Mechanical specifications			
Overall mass	1150 g		
Movable part mass	265 g		
Size	180 mm x 115 mm x 25 mm		
Vacuum	With vacuum		
Operating environn	nent		
Operating voltage	$24\mathrm{V}\mathrm{DC}\pm10\%$		
Continuous current	(Linear) 1.2 A (Rotary)0.9 A		
Peak current	(Linear) 2.4 A (Rotary)2.5 A		
Recommended load	≤150 g		
Recommended load inertia	a 20 g · cm ²		
IP rating	IP 40		
Recommended operating environmen	0°C-40°C, 85% RH or less		
International standard compliance	CE, FCC, RoHS		



en.dh-robotics.com 27/28

VOICE COIL ACTUATOR DRIVE

The drives are available in the following models:

0.02°

Drive	Communication method	Operating mode	I/O	Note	Model
ISD (DH-Robotics)	USB	Velocity mode Torque mode Position mode	6 digital inputs 4 digital outputs 2 12-bit analog inputs	Small size with excellent force control accuracy. The built-in soft landing function can be configured with rich parameters and is flexible for use.	EtherCAT: ISD-A5-E-01
	EtherCAT (CoE) (changeable to CANopen)	Position track mode Velocity track mode Torque track mode Interpolated position mode Cyclic Synchronous Position mode Cyclic Synchronous Velocity mode Cyclic Synchronous Torque mode			
SERVO TRONIX (Servotronix)	USB	Velocity mode Torque mode Position mode	8 digital inputs 3 fast digital inputs 6 digital outputs 2 fast digital outputs 1 16-bit analog input 2 14-bit analog inputs 1 analog output	Medium size, good force control accuracy, no soft landing function, and configurable I/O trigger script	EtherCAT: CDHD2-0031- DEC2
	RS232				
	Analog voltage	Analog velocity mode Analog torque mode			
	EtherCAT (CoE) (changeable to CANopen)	Position track mode Velocity track mode Torque track mode Interpolated position mode Cyclic Synchronous Position mode Cyclic Synchronous Velocity mode Cyclic Synchronous Torque mode			
ELMO (Elmo)	USB	Velocity mode Torque mode Position mode	6 digital inputs 2 digital outputs 1 analog input	Small size, excellent force control accuracy, built-in soft landing function, and programma- ble inside the drive	EtherCAT: G-MOL WHI5/100EE
	RS232				
	EtherNET UDP				
	EtherCAT (CoE) (changeable to CANopen)	Position track mode Velocity track mode Torque track mode Interpolated position mode Cyclic Synchronous Position mode Cyclic Synchronous Velocity mode Cyclic Synchronous Torque mode			

DH-ROBOTICS

A professional provider of precision motion control products and solutions

