


## Han C axial module, male 6-10mm<sup>2</sup>

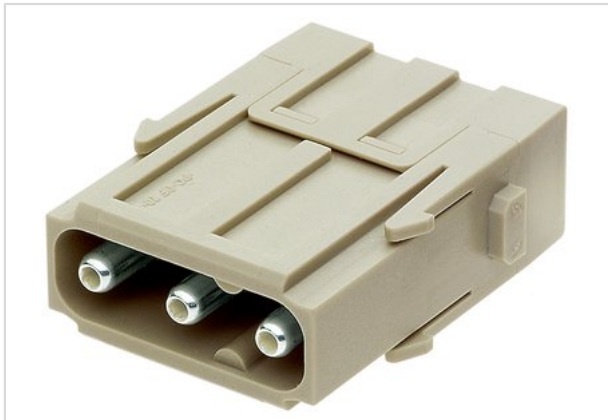

Part number	09 14 003 2602
Specification	Han C axial module, male 6-10mm <sup>2</sup>
HARTING eCatalogue	<a href="https://b2b.harting.com/09140032602">https://b2b.harting.com/09140032602</a>

### Identification

Category	Modules
Series	Han-Modular <sup>®</sup>
Type of module	Han <sup>®</sup> C module

### Version

Termination method	Axial screw termination
Gender	Male
Number of contacts	3

### Technical characteristics

Conductor cross-section	6 ... 10 mm <sup>2</sup>
Rated current	40 A
Rated voltage	690 V
Rated impulse voltage	8 kV
Pollution degree	3
Rated current acc. to UL	40 A
Rated voltage acc. to UL	600 V
Insulation resistance	>10 <sup>10</sup> Ω
Contact resistance	≤0.3 mΩ
Limiting temperature	-40 ... +125 °C
Stripping length	8 mm @ 6 mm <sup>2</sup> 11 mm @ 10 mm <sup>2</sup>
Tightening torque	2 Nm @ 6 mm <sup>2</sup> 2 Nm @ 10 mm <sup>2</sup>



Pushing Performance

## Technical characteristics

Mating cycles	≥500
---------------	------

## Material properties

Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy
Surface (contacts)	Silver plated
Material flammability class acc. to UL 94	V-0
RoHS	compliant with exemption
RoHS exemptions	6(c): Copper alloy containing up to 4 % lead by weight
ELV status	compliant with exemption
China RoHS	50
REACH Annex XVII substances	No
REACH ANNEX XIV substances	No
REACH SVHC substances	Yes
REACH SVHC substances	Lead

## Specifications and approvals

Specifications	EN 60664-1 IEC 61984
Approvals	DNV GL
UL / CSA	UL 1977 ECBT2.E235076 UL 2237 PVVA2.E318390 CSA-C22.2 No. 182.3 PVVA8.E318390

## Commercial data

Packaging size	2
Net weight	32.6 g
Country of origin	Germany
European customs tariff number	85366990
eCl@ss	27440217 Module for industrial connectors (power/signals)